

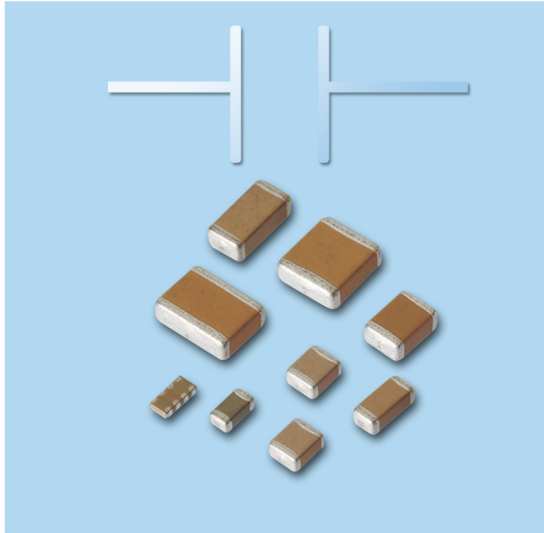
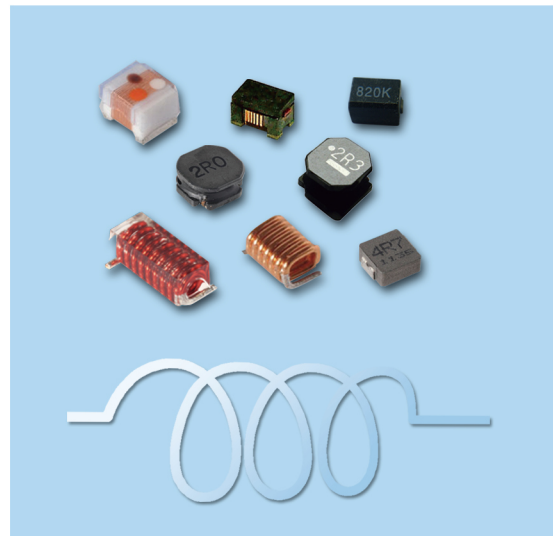


MLCC

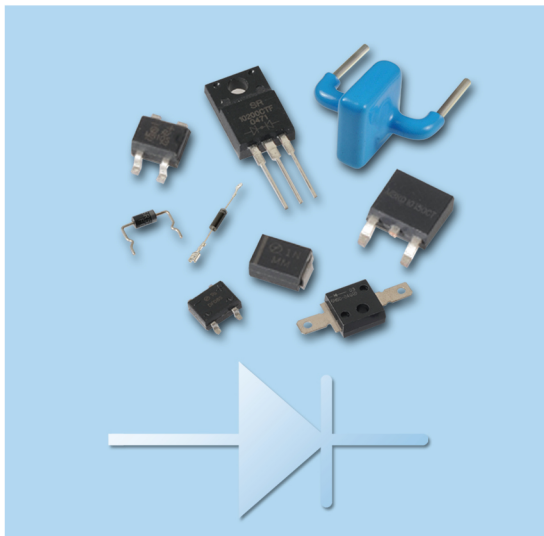

CHIP-R

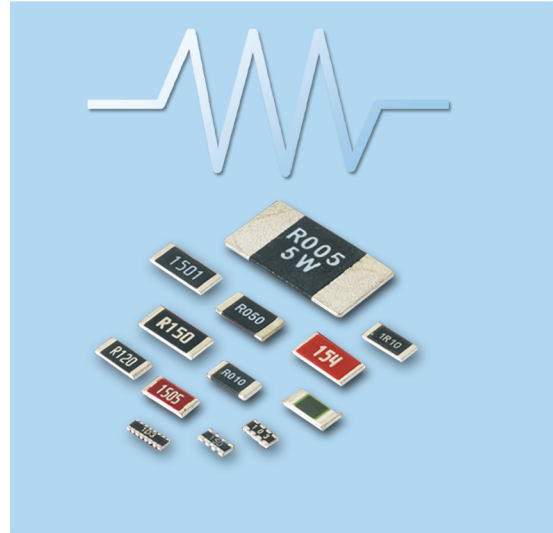

DIODE

COIL

ABOUT PDC

Introduction

Prosperity Dielectrics Co., Ltd. (PDC) was founded in 1990 as the 1st local manufacturer and exporter in Taiwan for ceramic dielectric powders and multiple-layer ceramic chip capacitors (MLCCs). PDC joined to Walsin Technology Corporation (WTC) as an allied company in September 2005, and incorporated Frontier to create solid synergy in 2008. Our product lines expand to SMD magnetic chips, power chokes, coils, diode and transformers.

信昌電子陶瓷成立於 1990 年，為國內少數能自行供給瓷粉原料並同時銷售積層陶瓷電容的被動元件廠商，更是唯一有能力由上游初發原料，向下垂直整合至被動晶片元件的廠商。2005 年信昌電陶與華新集團進行策略聯盟、2008 年正式合併弘電電子，將銷售範圍從介電瓷粉、半導體陶瓷電容器瓷片、積層陶瓷電容、晶片電阻延伸到二極體與線圈，成為國內唯一可全數提供特殊電容、電感、電阻之被動元件供應商。

Milestone 歷史沿革 	<p>1990 PDC former parent company, Taiwan Cement, merged with Mei Da Mei and founded PDC in Nantou. 台泥集團購買美大美電子公司，信昌電子陶瓷正式成立。</p> <p>1995 PDC merged with Taiwan Precision Material Corporation. 信昌電子陶瓷併購台灣精密材料公司。</p> <p>2002 Public Listed in OTC. 信昌電子陶瓷正式上櫃。</p> <p>2005 PDC was strategically allied with Wasin Tech. 與華新科技(股)公司策略聯盟。</p> <p>2007 To be strategically allied with Frontier, and setting up new production lines, Diode and Magnetic components. 與弘電電子工業(股)公司策略聯盟，生產二極體與磁性材料元件。</p> <p>2008 Positioned as Specialty and Material BG in PSA Group. 集團推動 PSA 被動系統聯盟企業識別，信昌電子陶瓷定位為特殊品及材料事業群。</p>
Core Technology 關鍵技術 	<p>1988 Manufacturing and developing ceramic dielectric materials. 生產製造圓板電容粉末、開發。</p> <p>1990 Manufacturing Multilayer Ceramic Capacitors. 生產製造積層陶瓷晶片電容。</p> <p>1995 Manufacturing Ceramic Chip Resistors and Ceramic Chip Coil 生產陶瓷晶片電阻、陶瓷晶片電感。</p> <p>2001 As the 1st manufacturer and provider in Taiwan for ceramic dielectric powders and multilayer ceramic chip capacitors (MLCC). 臺灣第一家自行供給晶片電容器介電瓷粉之被動元件廠商。</p> <p>2001 With self-made conducting dielectric powder, controlling the complete key technology from material to manufacture. 自製半導體介電瓷粉，掌握由材料至製程的完整關鍵性技術。</p> <p>2007 Manufacturing Diode and magnetic components. 生產二極體與磁性材料元件。</p>
Brand Value 品牌價值 	<p>2001 The first supplier in Asia to get SEMKO product safety certificate. 亞洲第一家獲得 SEMKO 安全規格認證之供應商。</p> <p>2003 ISO 9001 certified. 獲 ISO 9001 驗證通過。</p> <p>2004 Industrial Sustainable Excellence Award. 榮獲經濟部工業局工業精銳獎。</p> <p>2004 TS16949、ISO 14000 and OHSAS 18000 certified. 獲 TS16949、ISO 14000 及 OHSAS 18000 驗證。</p> <p>2008 IECQ QC080000 HSF certified. 獲 IECQ QC080000 HSF 驗證。</p> <p>2007 Common Wealth Magazine Top 1000 Manufacturers in Taiwan Ranked in No. 705. 天下雜誌 1000 大製造業排名第 705 名。</p> <p>2008 Common Wealth Magazine Top 1000 Manufacturers in Taiwan Ranked in No. 682. 天下雜誌 1000 大製造業排名第 682 名。</p> <p>2009 Common Wealth Magazine Top 1000 Manufacturers in Taiwan Ranked in No. 677. 天下雜誌 1000 大製造業排名第 677 名。</p> <p>2012 Recognition of Winning the Silver Invention Award for Copper or Its Alloy Cofirable Dielectric Ceramics. 榮獲國家發明創作獎 - 發明獎銀牌「可與銅及其合金進行共燒製作的介電陶瓷組成物」</p> <p>2015 MLCC product have obtained the IECQ certificate & the certificate of AS9100 management system for the aerospace industry. 通過 IECQ 第三方認證及 AS9100 航太工業管理系統驗證。</p>
Market Performance 市場表現 	<p>PDC ceramic dielectric powder ranks in No.2 in global capacity and No.3 in global market share. 介電陶瓷粉產品產能全球第二、市占率全球第三。</p> <p>The only local manufacturer in Taiwan with the capability in specialty products includes multiple-layer ceramic capacitors, chip resistors, and coils. 國內唯一可全數提供特殊電容、電感、電阻之被動元件供應商。</p> <p>The only local manufacturer in Taiwan entered the supply chain of Japan market. 國內唯一打入日本供應鏈之廠商。</p>

Support You Forward

With niche technology of key materials, PDC can meet the market requirements. The integration of researching and developing from materials to the customer-required components can shorten the time of mass production. To progressively make plans for each product to be with high added value functions, such as Mid and high voltage, high precision, large size capacitors, and high power, high precision, low resistance resistors or other high added value products. In the future, combine with core material technology and advance high frequency and high capacitance further.

由於掌握關鍵性材料的技術利基，信昌電陶可配合市場需求，由材料研發著手，向下整合開發客戶所需要的電子元件，縮短量產時效，並積極規劃各項產品朝高附加價值的零件功能領域邁進，如：中高壓、高精度、大尺寸之晶片電容器及高功率、高精度與低阻值之晶片電阻器等高附加價值產品。未來更將結合材料核心技術，進軍高頻及高容領域。

At present, PDC has developed ceramic dielectric powder used by NME and BME manufacturing process. Self-applied mass production and external sale are simultaneously carried out to improve the proportion to the supply of internal high-level MLCC materials. By the strategy of vertical production capability from ceramic dielectric powder material to MLCC finished goods, bring the high performance of vertical integration.

目前信昌電陶貴金屬製程及卑金屬製程(BME)使用的晶片電容器介電瓷粉已陸續開發完成，量產自用與對外銷售並行展開，提升國內高階積層電容瓷粉原料自主供應比率。藉由原料往下游整合至晶片電容器成品的延伸策略，發揮上下垂直整合的高度營運績效。

For the past few years, to extend the production capability of magnetic components and semiconductor series, PDC gradually set up the manufacturing equipments for semiconductor in Kun Shan Plant and the manufacturing equipments for coil and transformer in Dong Guan and Hunan Plant. The improvement of the production capability is able to increase the sales performance.

近年來，為了擴展磁性元件及半導體系列產品的產能，信昌電陶陸續在中國昆山廠增置半導體相關製造設備，在東莞廠、湖南廠、重慶廠增置電感、變壓器相關製造設備，藉由產能提升，大幅拉升業績。

Vertical integration & Complete key technology:

- Material (Ceramic Dielectric Powder)
- Semi-finished good (Semiconducting Ceramic Chip Capacitor)
- Finished goods (Chip Capacitor, Chip resistor, Coil, Diode)

上下游垂直整合，掌握完整關鍵性技術：

- 原料(介電瓷粉)
- 半成品(半導體陶瓷電容瓷片)
- 成品(晶片電容、晶片電阻、線圈、二極體)

Business Operation 經營模式分析

- Vertical integration to improve competitiveness.
- Building strategic alliances to strengthen competitiveness.
- Expanding Western and Japanese markets, cultivation high-end products.
- Moving into Chinese market to expand market share.
- 垂直整合發展，擺脫同業競爭
- 運用策略聯盟，產品水平延伸
- 拓展歐美日市場，深耕高階產品
- 跨足中國市場，擴大市佔率

Branding Strategy 品牌經營策略

- Developing specialized products market.
- Enhancing brand value with continuing innovation and R&D ability.
- Improving competitiveness through vertical integration.
- Satisfying customer's need through extending product lines.
- 深耕被動元件特殊品市場及其上游材料產業高階產品
- 持續創新研發能力，提升品牌含金量
- 產品垂直整合，強化競爭優勢
- 產品水平延伸，滿足客戶一次購足

Key to the Success 關鍵成功因素

- The only local manufacturer with vertical production capability from ceramic dielectric powder material to multiple-layer ceramic chip capacitors.
- Differentiating marketing strategy with niche product.
- Diversifying product lines to expand customer base.
- Continuing innovation and R&D ability.
- Focusing core competence with PSA group support.
- 國內唯一有能力由上游初發原料，向下垂直整合至被動晶片元件的廠商，掌握材料與製程的完整關鍵性技術
- 利基產品差異化與行銷差異化策略
- 產品線多元發展，擴大客戶群
- 持續創新與研發，開發新產品與導入新製程
- 共享集團資源，聚焦核心競爭力

Characteristics 企業特色

- PDC is the domestic manufacturer devoting to ceramic dielectric materials.
- 為國內廠商對介電瓷粉材料研發投資最深者

Notice for PDC Products

❏ Please read this notice before using the PROSPERITY DIELECTRICS CO., LTD.. products.

- Product information in this catalog is updated in May 2017. All of the contents specified herein are subjected to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products. Please note that PROSPERITY DIELECTRICS CO., LTD. shall not be responsible for any defective which is caused by using products without the spec instruction.
- Please contact PROSPERITY DIELECTRICS CO., LTD. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.
- All electronic components listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact PROSPERITY DIELECTRICS CO., LTD. for more detail in advance.
- Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.
- In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.
- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "PDC's official sales channel").
- It is only applicable to the products purchased from any of PDC's official sales channel.
- Please note that PROSPERITY DIELECTRICS CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. PROSPERITY DIELECTRICS CO., LTD. grants no license for such rights.
- The information of this specification is for reference. For more detailed specification, please refer to the official qualified data.

有關本公司產品的注意事項

❏ 請務必在使用本公司產品目錄之前閱讀。

- 本注意事項中記載的內容是2017年5月現在的內容。本產品目錄記載的內容由於產品的改良等原因發生變更時，恕不另行通知。在您定購我司產品之前請確認最新的產品資訊。
當您於《產品規格書》以外使用我司產品時，所引起應用設備的瑕疵我司將不承擔任何責任。
- 有關詳細產品規格我們準備有《產品規格書》，請向我司諮詢相關事宜。
- 在您使用我司產品時，請務必進行應用設備實裝狀態以及應用產品實際使用環境下的測評。
- 本目錄中電子零組件，適用於一般電子設備。『AV設備，OA設備，家電及辦公設備，資訊/通訊設備（手機，電腦等）』當您計畫把本產品目錄中記載的產品使用於可能會危及第三方生命安全的應用設備時，請務必提前與我公司取得聯繫，針對產品資訊加以確認。

- 【運輸用設備（火車控制設備，船舶控制設備等），交通用信號設備，防災設備，醫療用設備，公共性高的資訊通信設備..等（電話程式控制交換機，電話，無線電，電視信號等基地局）】另外，請不要在要求高度安全性，可靠性的應用設備上使用本產品目錄中記載的產品。【航太設備，航空設備，核控制設備，用於海底的設備，軍事設備等】同時，應用於安全性，可靠性要求較高的一般電子設備/電路時，請充分進行安全性測評，必要時請在設計過程中追加保護電路。
- 本目錄中所記載的內容適用於透過我司營業據點，銷售子公司，正式銷售代理商（即正規銷售管道）購買的我司產品。通過其他管道所購買的我司產品不在適用範圍之內。
- 由於使用本目錄記載的產品引起的有關第三方智慧財產權的衝突，我司概不負責。本產品目錄不代表相關權利的實施許諾。
- 內部記載之產品規格僅提供參考，實際規格請依照我司標準承認書為準。

Contents

FE	3
Mega cap Stacked Capacitors Series	
FJ	5
Anti-Arcing High-Voltage Multilayer Ceramic Chip Capacitors	
FR	8
High Reliability for Industrial Grade	
MT	15
Automotive Capacitor Qualified to AEC-Q200	
MT (Soft Termination)	20
Automotive Capacitor Qualified to AEC-Q200	
MG	22
Automotive Caps without AEC-Q200 Certification	
FP	26
Anti-Bend (Soft termination) Capacitor Series	
FK-FH	33
Safety Certified capacitor series (X1/Y2 & X2)	
FV	35
Extra High Voltage Capacitor Series ($\geq 1\text{KV}$)	
FM	38
Mid-Voltage Capacitor Series (100V ~ 630V)	
FS	44
High Capacitance Capacitor Series ($\geq 1\mu\text{F}$)	
RF	47
Ultra High Q & Low ESR Capacitor Series	
FN	49
General purpose Capacitor Series	
CAP ARRAY	53
0612/0508 size Capacitor Arrays Series	
PACKAGING DIMENSION AND QUANTITY	55

Mega cap Stacked Capacitors

FEATURES

- High reliability and stability.
- Higher mechanical endurance.
- Anti thermal stress and mechanical stress.
- Improved vibration performance
- More capacitance without changing footprint.
- 100% Burn in.
- RoHS Compliant.

APPLICATION

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- Snubbers in high frequency power converters.
- Power supplies.
- Surge protection.
- Filtering, smoothing, and decoupling application.


PART NUMBER

FE	2H	X	105	K	631	E	D	L
PDC Family	Chip Q'ty and size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
Stacked Capacitors Series	The first digit : # of chips in stack Second digit code : chip size (below) A 1210 (3225) C 1812 (4532) G 1825 (4563) H 2220 (5750) I 2225 (5763)	N COG (NPO) X X7R	105 =10x10 ⁵ =1μF 106 =10x10 ⁶ =10μF	J = ± 5% K = ± 10% M = ± 20%	500 =50V 101 =100V 201 =200V 251 =250V 501 =500V 631 =630V 102 =1000V	B =Bulk T =Tray package E =Tape and 7" Reel, Embossed Tape L =Tape and 13" Reel, Embossed Tape	Reference Thickness Description (Table 1)	L =L type lead J =J type lead S =Straight type lead

GENERAL ELECTRICAL DATA

Dielectric	COG		X7R	
Size	1210, 1812, 1825, 2220, 2225		1210, 1812, 1825, 2220, 2225	
Rated voltage (WVDC)	50V, 100V, 200V, 250V, 500V, 630V, 1000V		50V, 100V, 200V, 250V, 500V, 630V, 1000V	
Capacitance range*	660nF Max.		44 μ F Max.	
Capacitance tolerance	J (± 5%), K (± 10%), M (± 20%)			
Tan δ *e)	Cap. Rang	Q Spec.		
	Cap<30pF:	Q≥400+20C	For 1 chip in stack≤2.5% For 2 chips in stack≤5.0%	
	Cap≥30pF:	Q≥1000		
Measured at the condition of 30~70% related humidity				
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature		Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition (25°C) for 24±2 hours before measurement	
	Cap. Rang	Test Condition	Cap. Rang	Test Condition
	Cap≤1000pF	1.0±0.2Vrms, 1.0MHz±10%	Cap≤10μF	1.0±0.2Vrms, 1.0KHz±10%
Cap>1000pF	1.0±0.2Vrms, 1.0KHz±10%	Cap>10μF	0.5±0.2Vrms, 120KHz±20%	
Insulation resistance at 500Vdc for 60 seconds	≥100GΩ or RxC≥ 500Ω-F whichever is smaller		≥10GΩ or RxC≥100Ω-F whichever is smaller	
Operating temperature	- 55 to + 125°C			
Capacitance characteristic	±30ppm / °C		±15%	
Termination	L / J / Straight type lead			

DIMENSIONS

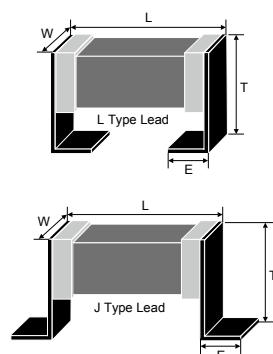

Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _b (mm)
1210 (3225)	3.50±0.40	2.50±0.40		1.70±0.15
1812 (4532)	4.80±0.40	3.20±0.40	Reference	1.70±0.15
1825 (4563)	4.80±0.40	6.30±0.50	Thickness	1.70±0.15
2220 (5750)	6.00±0.40	5.00±0.50	Description	1.70±0.15
2225 (5763)	6.00±0.40	6.30±0.50		1.70±0.15

MLCC

Chip R

Diode

Coil

■ Mega cap Stacked Capacitors

CAPACITANCE RANGE (MAX.)

COG

Size	Code	Rated Voltage						
		50V	100V	200V	250V	500V	630V	1000V
1210	1A	683	473	333	333	183	153	392
	2A	134	104	663	663	363	333 (M)	782
1812	1C	154	104	563	563	393	333	562
	2C	334 (M)	224 (M)	124	124	783	663	123
1825	1G	154	124	104	104	683	683	123
	2G	334	244	204	224 (M)	134	134	243
2220	1H	274	184	104	104	683	563	123
	2H	544	364	224 (M)	224 (M)	134	124	243
2225	1I	334	224	154	154	104	823	123
	2I	664	444	334 (M)	334 (M)	224 (M)	164	243

X7R

Size	Code	Rated Voltage						
		50V	100V	200V	250V	500V	630V	1000V
1210	1A	475	335	684	684	154	154	683
	2A	106	665	135	135	334 (M)	334 (M)	134
1812	1C	106	565	105	105	474	184	104
	2C	226 (M)	126	225 (M)	225 (M)	105	364	224 (M)
1825	1G	106	106	275	275	824	824	334
	2G	226 (M)	226 (M)	545	545	165	165	664
2220	1H	226	106	275	275	105	105	394
	2H	446	226 (M)	545	545	225 (M)	225 (M)	784
2225	1I	226	106	395	395	155	155	394
	2I	446	226 (M)	785	785	335 (M)	335 (M)	784

RATING

TABLE 1

Code	Description	Code	Description	Code	Description
A	3.00±0.30 mm	J	7.80±0.30 mm	S	12.60±0.30 mm
B	3.60±0.30 mm	K	8.40±0.30 mm	T	13.20±0.30 mm
C	4.20±0.30 mm	L	9.00±0.30 mm		
D	4.80±0.30 mm	M	9.60±0.30 mm		
E	5.40±0.30 mm	N	10.20±0.30 mm		
F	6.00±0.30 mm	P	10.80±0.30 mm		
G	6.60±0.30 mm	Q	11.40±0.30 mm		
H	7.20±0.30 mm	R	12.00±0.30 mm		

For more information about products with special capacitance or data, please contact PDC local representative.

MLCC

Chip R

Diode

Coil

■ Anti-Arcing High-Voltage Multilayer Ceramic Chip Capacitors

FEATURES

- Special interior design offers high voltage rating in a given case size.
- High reliability and stability.
- Anti-Arcing
- RoHS compliant

APPLICATION

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- LAN/WLAN interface.
- Modem.
- Power supplies.


PART NUMBER

FJ	31	X	103	K	102	E	C	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
Anti-Arcing	21 0805 (2012)	N COG(NPO)	102 =10x10 [∧] 2	J = ± 5%	102 =1000V	E =	Reference	G =RoHS
High voltage application with ≥ 1KVdc	31 1206 (3216)	X X7R	=1000pF	K =± 10%	152 =1500V	Tape and 7" Reel, Embossed Tape	Thickness Description	Compliant
	32 1210 (3225)		100 =10x10 [∧] 0	M =± 20%	202 =2000V			
	42 1808 (4520)		=10pF		302 =3000V	P =		
	43 1812 (4532)				402 =4000V	Tape and 7" Reel, Paper Tape		
	46 1825 (4563)					L =		
	55 2220 (5750)					Tape and 13" Reel, Embossed		
	56 2225 (5763)					G =		
						Tape and 13" Reel, Paper Tape		

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225
Rated voltage (WVDC)	1KV, 1.5KV, 2KV, 3KV, 4KV	1KV, 1.5KV, 2KV, 3KV, 4KV
Capacitance range*	0.5pF ~12nF	100pF ~ 390nF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%) K (±10%) M (±20%)
Tan δ *	Cap. Rang Q Spec. Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	≤2.5%
Measured at the condition of 30~70% related humidity.		
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature	Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.
	Cap. Rang Test Condition	Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.
	Cap≤1000pF 1.0±0.2Vrms, 1.0MHz±10%	
	Cap>1000pF, 1.0±0.2Vrms, 1.0kHz±10%	
Insulation resistance	≥100GΩ or R·C≥500Ω·F whichever is smaller	≥10GΩ or R·C≥100Ω·F whichever is smaller
Operating temperature		-55 to +125°C
Temperature coefficient	±30ppm / °C	±15%
Termination	Ag (or Cu)/Ni/Sn (lead-free termination)	

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _b (mm)
0805 (2012)	2.10±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.3±0.30	1.60±0.20		0.60±0.20
1210 (3225)	3.30±0.40	2.50±0.30		0.75±0.35
1808 (4520)	4.50±0.40/-0.30	2.00±0.25	Reference Thickness Description	0.75±0.35
1812 (4532)	4.50±0.40/-0.30	3.20±0.30		0.75±0.35
1825 (4563)	4.50±0.40/-0.30	6.30±0.40		0.75±0.35
2220 (5750)	5.70±0.40	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.40	6.30±0.40		0.85±0.35

MLCC

Chip R

Diode

Coil

■ Anti-Arcing High-Voltage Multilayer Ceramic Chip Capacitors

RATING

NPO

Size	0805	1206				1210				1808				1812				1825				2220					2225						
Cap	Code	1KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	
1.5pF	1R5	C	X	X	X																												
1.8pF	1R8	C	X	X	X																												
2.2pF	2R2	C	X	X	X							C	C	C	C																		
2.7pF	2R7	C	X	X	X							C	C	C	C																		
3.3pF	3R3	C	X	X	X							C	C	C	C																		
3.9pF	3R9	C	X	X	X							C	C	C	C																		
4.7pF	4R7	C	X	X	X							C	C	C	C																		
5pF	5R0	C	X	X	X							C	C	C	C																		
5.6pF	5R6	C	X	X	X							C	C	C	C																		
6.8pF	6R8	C	X	X	X							C	C	C	C																		
8.2pF	8R2	C	X	X	X							C	C	C	C																		
10pF	100	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
12pF	120	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
15pF	150	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
18pF	180	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
22pF	220	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
27pF	270	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
33pF	330	C	X	M	M	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
39pF	390	C	X	M	M	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
47pF	470	C	M	M	M	E	M	M	M	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
56pF	560	C	M	C	C	E	M	C	C	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
68pF	680	C	M	C	C	E	M	C	C	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
82pF	820	C	C	C	C	E	M	C	C	F	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
100pF	101	C	C	C	C		C	C	C	F	C	C	C	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
120pF	121	C	C	E	E		C	C	C	F	C	C	C	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
150pF	151	C	C	E	E		C	E	E	F	C	F	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
180pF	181	C	E	E	E		C	E	E	F	C	F	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
220pF	221	C	E	E	E		E	E	E	F	C	F	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
270pF	271	C	E	E	E		E	E	E	G	F	F	F	F	C	F	F	F	F	F	F	F	F	F	F	F	F	F	G	F	F	F	
330pF	331	C	E	E	E		E	E	E		F	F	F	F	C	F	F	F	F	F	F	F	F	F	F	F	F	G	G	F	F	F	
390pF	391		E	E	E		E	E	E		F	F	F	F	F	C	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	
470pF	471		E	E	E		E	E	E		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	
560pF	561		E				E	E	E		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	
680pF	681		E				E	E	E		F	F	F		F	F	F	F	F	F	F	F	F	F	F	G	F	F	F	F	F	F	
820pF	821		E				E	E	E		F	F	F		F	F	F	G	F	F	F	G	F	F	F	G		F	G	G	G	G	
1000pF	102		E				E	F	F		F	F	F		F	F	F	G	F	F	F	G	F	F	F	G		F	G	G	G	G	
1200pF	122		E				E	F	F		F	F	F		F	F	F		F	F	F	G	G	G	G	G		F	G	G	G	G	
1500pF	152						F	G	G		F	F	F		F	F	F		F	G	G	G	G	G	G	G		F	G	G	G	G	
1800pF	182						G	G	G		F	F	F		F	F	F		F	G	G	G	G	G	G	G		F	G	G	G	G	
2200pF	222						G				F				F	F	F		F	G	G	G	G	G	G	G		F	G	G	G	G	
2700pF	272						G				F				F	G	G		F	G	G	G	G	G	G	G		F	G	G	G	G	
3300pF	332						G				F				F	G	G		F	G	G		G	G	G			F	G	G	G	G	
3900pF	392						G								G				G	G	G		G	G	G			F	G	G			
4700pF	472														G				G	G	G		G	G	G			F	G	G			
5600pF	562														G				G	G	G		G	G	G			G	G	G			
6800pF	682														G				G	G	G		G	G	G			G	G	G			
8200pF	822														G				G	G	G		G	G	G			G	G	G			
0.010μF	103														G				G				G					G	G	G			
0.012μF	123														G				G				G					G					

MLCC

Chip R

Diode

Coil

■ Anti-Arcing High-Voltage Multilayer Ceramic Chip Capacitors

RATING

		X7R																																	
Size	0805	1206				1210			1808				1812					1825				2220				2225									
Cap	Code	1KV	1KV	1.5KV	2KV	1KV	1.5KV	2KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV		
100pF	101	X	C	C	C																														
120pF	121	X	C	C	C																														
150pF	151	X	C	C	C				C	C	C	C	F																						
180pF	181	X	C	C	C				C	C	C	C	F																						
220pF	221	X	C	C	C	C	E	E	C	C	C	C	F																						
270pF	271	X	C	C	C	C	E	E	C	C	C	C	F	C	C	C	E	F					F					F						F	
330pF	331	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F					F				F							F	
390pF	391	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F					F				F							F	
470pF	471	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F					F				F							F	
560pF	561	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F					F				F							F	
680pF	681	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F					F				F							F	
820pF	821	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F					F				F							F	
1000pF	102	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
1200pF	122	X	C	E	E	C	F	F	C	F	F	F		C	C	C	F	G	F	F	F	F	G	F	F	F	F	G	F	F	F	F	G	F	
1500pF	152	C	C	E	E	C	F	F	C	F	F	F		C	C	C	F	G	F	F	F	F	G	F	F	F	F	G	F	F	F	F	G	F	
1800pF	182	C	C	E	E	C	F	F	C	F	F	F		C	E	E	G	G	F	F	F	F	G	F	F	F	F	G	F	F	F	F	G	F	
2200pF	222	C	C	E	E	C	F	F	C	F	F	F		C	E	E	G		F	F	F	F		F	F	F	F		F	F	F	F		F	
2700pF	272	C	C	E	E	C	G	G	C	F	F			C	E	E	G		F	F	F	F		F	F	F	F		F	F	F	F		F	
3300pF	332	C	C	E	E	C	G	G	C	F	F			C	F	F	G		F	F	F	F		F	F	F	F		F	F	F	F		F	
3900pF	392	C	C	E		E	G	G	C	F	F			C	F	F	G		F	F	F	F		F	F	F	F		F	F	F	F		F	
4700pF	472	C	C	E		E	G	G	C	F	F			C	F	F	G		F	F	F	F		F	F	F	F		F	F	F	F		F	
5600pF	562	C	C			E	G	G	F	F	F			C	G	G			F	F	F	G		F	F	F	F		F	F	F	F		G	
6800pF	682	C	C			E	G	G	F	F	F			C	G	G			F	F	F	G		F	F	F	G		F	F	F	F		G	
8200pF	822	C	C			E	G	G	F					C	G	G			F	F	F	G		F	G	G	G		F	F	F	F		G	
0.010uF	103		C			E			F					E	G	G			F	F	F	G		F	G	G	G		F	F	F	F		G	
0.012uF	123		E			E			F					F					F	G	G	H		F	G	G	H		F	G	G	G		G	
0.015uF	153		E			E			F					F					F	G	G	H		F	G	G	H		F	G	G	G		G	
0.018uF	183		E			E			F					G					F	G	G	H		F	H	H	H		F	G	G	H		H	
0.022uF	223		E			E			F					G					F	G	G			F	H	H		F	G	G				G	
0.027uF	273					E			F					G					F	H	H			F	H	H		F	G	G				G	
0.033uF	333					E			F					G					F	H	H			F	H	H		F	G	G				G	
0.039uF	393					F			F					G					F	H	H			F	H	H		F	G	H				H	
0.047uF	473					G			F					G					F	H	H			F	H	H		F	G	H				H	
0.056uF	563					G			F					G					F	H	H			F	H	H		F	G	H				H	
0.068uF	683					G								G					F					G					F	G					H
0.082uF	823													G										G					F	G					H
0.10uF	104													G										G					G	G					H
0.12uF	124																							H					G						H
0.15uF	154																							H					H						H
0.18uF	184																							H					H						H
0.22uF	224																							H					H						H
0.27uF	274																							H					H						H
0.33uF	334																							H					H						H
0.39uF	394																							H					H						H

MLCC

Chip R

Diode

Coil

High Reliability for Industrial Grade

FEATURES

- Realize high capacitance in small sizes.
- Capacitor with lead-free termination (pure Tin).
- RoHS compliant.
- HALOGEM compliant.
- Surface mount suited for wave and reflow soldering.
- High reliability and no polarity.
- Excellent in high frequency characteristic.

APPLICATION

- Digital circuit coupling or decoupling applications.
- For high frequency and high-density type power suppliers.
- For bypassing.
- Ideal for smoothing circuits.
- DC to DC converter.


PART NUMBER

FR	32	X	225	K	101	E	G	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
High Quality Equipment Capacitor	18 0603 (1608) 21 0805 (2012) 31 1206 (3216) 32 1210 (3225) 42 1808 (4520) 43 1812 (4532) 46 1825 (4563) 55 2220 (5750) 56 2225 (5763)	N COG(NPO) X X7R	106=10x10 [∧] 6 =10μF 100=10x10 [∧] 0 =10pF	J= ±5% K= ±10 % M= ±20 %	250=25V 500=50V 101=100V 201=200V 251=250V 501=500V 631=630V 102=1000V 152=1500V 202=2000V 302=3000V 402=4000V	E= Tape and 7" Reel, Embossed Tape P= Tape and 7" Reel, Paper Tape L= Tape and 13" Reel, Embossed G= Tape and 13" Reel, Paper Tape	Reference Thickness Description	G=RoHS Compliant Q=Surface Coating (Size 1206~2225)

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225
Rated voltage (WVDC)	25V, 50V, 100V, 200V, 250V, 500V, 630V, 1000V, 1500V, 2000V, 3000V, 4000V	25V, 50V, 100V, 200V, 250V, 500V, 630V, 1000V, 1500V, 2000V, 3000V, 4000V
Capacitance range	0.5pF ~ 330nF	
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) 10pF≤Cap: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%) K (±10%) M (±20%)
Tan δ	Cap. Rang Q Spec. Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	≤2.5%
Measured at the condition of 30~70% related humidity.		
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature	Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.
	Cap. Rang Test Condition Cap≤1000pF 1.0±0.2Vrms, 1.0MHz±10% Cap>1000pF 1.0±0.2Vrms, 1.0kHz±10%	1.0±0.2Vrms, 1.0kHz±10% for C≤10 μ F; 0.5±0.2Vrms, 120Hz±20% for C>10 μ F, at 25°C ambient temperature
Insulation resistance	≥100GΩ or R·C≥500Ω·F whichever is smaller	≥10GΩ or R·C≥100Ω·F whichever is smaller
Operating temperature	-55 to +125°C	
Temperature coefficient	±30ppm / °C	±15%
Termination	Cu (or Ag)/Ni/Sn (lead-free termination)	
Humidity (Damp Heat) Load	Test Condition • Test temp: 85±2°C • Humidity: 85% RH • Test time: 500+24/-0 hrs. • To apply voltage: rated voltage (Max.:100V) • Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II). • No remarkable damage.	• Cap change: X7R, within ±12.5% NPO, Within ±5% or ±0.5pF whichever is larger. • Q/D.F. value: X7R, ≤200% x Initial requirement • I.R.: ≥1GΩ or RxC≥50Ω·F whichever is smaller.

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _B (mm)
0603 (1608)	1.60±0.15	0.80±0.15		0.40±0.15
0805 (2012)	2.00±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.20±0.20	1.60±0.20		0.60±0.20
1210 (3225)	3.30±0.30	2.50±0.30	Reference	0.75±0.35
1808 (4520)	4.50±0.40	2.00±0.25	Thickness	0.75±0.35
1812 (4532)	4.50±0.40	3.20±0.30	Description	0.75±0.35
1825 (4563)	4.50±0.40	6.30±0.40		0.75±0.35
2220 (5750)	5.70±0.40	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.40	6.30±0.40		0.85±0.35

High Reliability for Industrial Grade

RATING

		NPO																							
Size		0603					0805								1206										
Cap	Code	25V	50V	100V	200V	250V	25V	50V	100V	200V	250V	500V	630V	1KV	25V	50V	100V	200V	250V	500V	630V	1KV	1.5KV	2KV	3KV
0.5pF	OR5	S	S	S	S	S	A	A	A	A	A	A	A												
0.6pF	OR6	S	S	S	S	S	A	A	A	A	A	A	A												
0.7pF	OR7	S	S	S	S	S	A	A	A	A	A	A	A												
0.8pF	OR8	S	S	S	S	S	A	A	A	A	A	A	A												
0.9pF	OR9	S	S	S	S	S	A	A	A	A	A	A	A												
1.0pF	1R0	S	S	S	S	S	A	A	A	A	A	A	A												
1.2pF	1R2	S	S	S	S	S	A	A	A	A	A	A	A		X	X	X								
1.5pF	1R5	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
1.8pF	1R8	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
2.2pF	2R2	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
2.7pF	2R7	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
3.3pF	3R3	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
3.9pF	3R9	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
4.7pF	4R7	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
5.0pF	5R0	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
5.6pF	5R6	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
6.8pF	6R8	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
8.2pF	8R2	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	X
10pF	100	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
12pF	120	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
15pF	150	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
18pF	180	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
22pF	220	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
27pF	270	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	X	E
33pF	330	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	M	M	E
39pF	390	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	M	M	E
47pF	470	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	M	M	M	E
56pF	560	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	M	C	C	E
68pF	680	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	M	C	C	E
82pF	820	S	S	S	S	S	A	A	A	A	A	X	X	C	X	X	X	X	X	X	X	C	C	C	E
100pF	101	S	S	S	S	S	A	A	A	A	X	X	X	C	X	X	X	X	X	X	X	C	C	C	
120pF	121	S	S	S	S	S	A	A	A	A	X	C	C	C	X	X	X	X	X	X	X	C	E	E	
150pF	151	S	S	S	S	S	A	A	A	X	X	C	C	C	X	X	X	X	X	X	X	C	E	E	
180pF	181	S	S	S	S	S	A	A	A	X	C	C	C	C	X	X	X	X	X	X	X	E	E	E	
220pF	221	S	S	S	S	S	A	A	A	C	C	C	C	C	X	X	X	X	X	X	X	E	E	E	
270pF	271	S	S	S	B	B	A	A	A	C	C	C	C	C	X	X	X	X	M	M	M	E	E	E	
330pF	331	S	S	S	B	B	A	A	A	C	C	C	C	C	X	X	X	X	M	M	M	E	E	E	
390pF	391	S	S	S	B	B	X	X	X	C	C	C	C		X	X	X	X	M	M	M	E	E	E	
470pF	471	S	S	S	B	B	X	X	X	C	C	C	C		X	X	X	M	M	M	E	E	E		
560pF	561	S	S	S	B	B	X	X	X	C	C	C	C		X	X	X	M	C	C	C	E			
680pF	681	S	S	S	B	B	X	X	X	C	C	C	C		X	X	X	M	C	C	C	E			
820pF	821	S	S	S	B	B	X	X	X	C	C	C	C		X	X	X	M	E	E	E	E			
1000pF	102	S	S	S			X	X	X	C	C	C	C		X	X	X	M	E	E	E	E			
1200pF	122	B	B				X	X	X	C	C	C	C		X	X	X	M	E	E	E	E			
1500pF	152						X	X	X	C	C	C	C		X	X	X	C	E	E	E	E			
1800pF	182						X	X	X	C	C	C	C		X	X	X	C	E	E	E	E			
2200pF	222						X	X	X	C	C	C	C		X	X	X	C	E	E	E	E			
2700pF	272						C	C	C	C	C				X	X	X	C	E	E	E	E			
3300pF	332						C	C	C	C	C				X	X	X	C	E	E	E	E			
3900pF	392						C	C	C	C					X	X	X	E	E	E	E	E			
4700pF	472						C	C	C	C					X	X	X	E	E	E	E	E			
5600pF	562						C	C	C	C					X	X	X	E	E	E	E	E			
6800pF	682						C	C	C						M	M	M	E	E	E					
8200pF	822						C	C							C	C	C	E	E						
0.010μF	103						C	C							C	C	C	E	E						
0.012μF	123														P	P	P								
0.015μF	153														P	P	P								
0.018μF	183														P	P									
0.022μF	223														P	P									
0.027μF	273																								

MLCC

Chip R

Diode

Coil

■ High Reliability for Industrial Grade

RATING

NPO

Size		1210									1808						1812									
Cap	Code	25V	50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV
1.2pF	1R2																									
1.5pF	1R5																									
1.8pF	1R8																									
2.2pF	2R2									C	C	C	C	C	C	C	C	C								
2.7pF	2R7									C	C	C	C	C	C	C	C	C								
3.3pF	3R3									C	C	C	C	C	C	C	C	C								
3.9pF	3R9									C	C	C	C	C	C	C	C	C								
4.7pF	4R7									C	C	C	C	C	C	C	C	C								
5.0pF	5R0									C	C	C	C	C	C	C	C	C								
5.6pF	5R6									C	C	C	C	C	C	C	C	C								
6.8pF	6R8									C	C	C	C	C	C	C	C	C								
8.2pF	8R2									C	C	C	C	C	C	C	C	C								
10pF	100	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
12pF	120	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
15pF	150	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
18pF	180	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
22pF	220	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
27pF	270	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
33pF	330	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
39pF	390	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
47pF	470	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
56pF	560	M	M	M	M	M	M	M	M	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
68pF	680	M	M	M	M	M	M	M	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
82pF	820	M	M	M	M	M	M	M	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
100pF	101	M	M	M	M	M	M	C	C	F	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C
120pF	121	M	M	M	M	M	M	C	C	F	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C
150pF	151	M	M	M	M	M	M	C	E	F	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C
180pF	181	M	M	M	M	M	M	C	E	F	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	F
220pF	221	M	M	M	M	M	M	E	E	F	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	F
270pF	271	M	M	M	M	M	M	E	E	G	C	C	C	F	F	F	F	F	C	C	C	C	C	C	F	F
330pF	331	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F	F	C	C	C	C	C	C	F	F
390pF	391	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F	F	C	C	C	C	C	C	F	F
470pF	471	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F	F	C	C	C	C	C	F	F	F
560pF	561	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F	F	C	C	C	C	C	F	F	F
680pF	681	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F		C	C	C	C	C	F	F	F
820pF	821	M	M	M	M	M	M	E	E		C	C	C	F	F	F	F		C	C	C	C	C	F	F	G
1000pF	102	M	M	M	C	C	C	E	F		C	C	C	F	F	F	F		C	C	C	C	C	F	F	G
1200pF	122	M	M	M	C	C	C	E	F		C	C	C	F	F	F	F		C	C	C	C	C	F	F	
1500pF	152	M	M	M	C	C	C	F	G		C	C	C	F	F	F	F		C	C	C	C	C	F	F	
1800pF	182	M	M	M	C	C	C	G	G		C	C	C	F	F	F	F		C	C	C	C	C	F	F	
2200pF	222	M	M	M	C	C	C	G			C	C	C	F	F	F			C	C	C	C	C	F	F	
2700pF	272	M	M	M	C	C	C	G			C	C	C	F	F	F			C	C	C	C	C	F	G	
3300pF	332	M	M	M	C	C	C	G			C	C	C	F	F	F			C	C	C	C	C	F	G	
3900pF	392	M	M	M	C	C	C	G			C	C	C	F	F				C	C	C	C	C	G		
4700pF	472	M	C	C	C	C	C				C	C	C	F	F				C	C	C	C	C	G		
5600pF	562	M	C	C	C	C	C				C	C	E	F	F				C	C	C	C	C	G		
6800pF	682	M	E	E	E	E	E				C	C	E	F	F				C	C	C	C	C			
8200pF	822	M	E	E	E	E	E				C	E	F	F	F				C	C	C	C	C			
0.010μF	103	M	E	E	F	F	F				C	E	F	F	F				C	C	C	C	C			
0.012μF	123	C	E	E	F	F	F				E	F	F	F					C	C	E	E	E			
0.015μF	153	C	E	F	G	G	G				E	F	F						C	C	E	E	E			
0.018μF	183	F	F	G	G	G					F	F	F						C	E	F	F	F			
0.022μF	223	F	F	G	G						F	F							C	E	F	F	F			
0.027μF	273	F	G	G	G						F	F							C	F	G	G	G			
0.033μF	333	F	G	G	G						F								C	F	G	G	G			
0.039μF	393	G	G	G							F								F	G	G	G				
0.047μF	473	G	G	G															F	G	G					
0.056μF	563	G	G																G	G	G					
0.068μF	683	G	G																G	G						
0.082μF	823																		G	G						
0.10μF	104																		G	G						
0.12μF	124																		G							
0.15μF	154																		G							

MLCC

Chip R

Diode

Coil

High Reliability for Industrial Grade

RATING

NPO

Size	1825								2220								2225									
	Cap	Code	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV
10pF	100	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F		E	E	E	E	E	F	F	F	
12pF	120	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F		E	E	E	E	E	F	F	F	
15pF	150	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F		E	E	E	E	E	F	F	F	
18pF	180	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F		E	E	E	E	E	F	F	F	
22pF	220	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F		E	E	E	E	E	F	F	F	
27pF	270	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
33pF	330	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
39pF	390	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
47pF	470	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
56pF	560	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
68pF	680	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
82pF	820	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
100pF	101	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
120pF	121	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
150pF	151	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
180pF	181	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
220pF	221	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	F	E	E	E	E	E	F	F	F	F
270pF	271	E	E	E	E	F	F	F	E	E	E	E	E	F	F	F	G	E	E	E	E	E	F	F	F	G
330pF	331	E	E	E	E	F	F	F	E	E	E	E	E	F	F	G	G	E	E	E	E	E	F	F	F	
390pF	391	E	E	E	E	F	F	F	E	E	E	E	E	F	F	G		E	E	E	E	E	F	F	F	
470pF	471	E	E	E	E	F	F	F	E	E	E	E	E	F	F	G		E	E	E	E	E	F	F	F	
560pF	561	E	E	E	E	F	F	F	E	E	E	E	E	F	F	G		E	E	E	E	E	F	F	F	
680pF	681	E	E	E	E	F	F	G	E	E	E	E	E	F	F	G		E	E	E	E	E	F	F	F	
820pF	821	E	E	E	E	F	F	G	E	E	E	E	E	F	F	G		E	E	E	E	E	F	G	G	
1000pF	102	E	E	E	E	F	F	G	E	E	E	E	E	F	F	G		E	E	E	E	E	F	G	G	
1200pF	122	E	E	E	E	F	F	G	E	E	E	E	E	G	G	G		E	E	E	E	E	F	G	G	
1500pF	152	E	E	E	E	F	F	G	E	E	E	E	E	G	G	G		E	E	E	E	E	F	G	G	
1800pF	182	E	E	E	E	F	F	G	E	E	E	E	E	G	G	G		E	E	E	E	E	F	G	G	
2200pF	222	E	E	E	E	F	F	G	E	E	E	E	E	G	G	G		E	E	E	E	E	F	G	G	
2700pF	272	E	E	E	E	F	F	G	E	E	E	E	E	G	G	G		E	E	E	E	E	F	G	G	
3300pF	332	E	E	E	E	F	F	G	E	E	E	E	E	G	G			E	E	E	E	E	F	G	G	
3900pF	392	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	F	G		
4700pF	472	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	F	G		
5600pF	562	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	G	G		
6800pF	682	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	G	G		
8200pF	822	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	G	G		
0.010μF	103	E	E	E	E	G			E	E	E	E	E	G				E	E	E	E	E	G	G		
0.012μF	123	E	E	E	E	G			E	E	E	E	E	G				E	E	E	E	E	G			
0.015μF	153	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.018μF	183	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.022μF	223	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.027μF	273	E	E	E	F				E	E	E	F	F					E	E	E	E	E				
0.033μF	333	E	E	E	F				E	E	F	F	F					E	E	E	E	E				
0.039μF	393	E	E	F	G				E	E	F	G	G					E	E	F	F	F				
0.047μF	473	E	E	F	G				E	E	F	G	G					E	E	F	F	F				
0.056μF	563	E	F	G	G				E	F	G	G	G					E	E	G	G	G				
0.068μF	683	E	F	G	G				F	F	G	G						E	F	G	G	G				
0.082μF	823	F	G	G					G	G	G							F	F	G	G	G				
0.10μF	104	G	G	G					G	G	G							F	G	G	G					
0.12μF	124	G	G						G	G								G	G	G						
0.15μF	154	G							G	G								G	G	G						
0.18μF	184								G	G								G	G							
0.22μF	224								G									G	G							
0.27μF	274								G									G								
0.33μF	334																	G								

MLCC

Chip R

Diode

Coil

■ High Reliability for Industrial Grade

RATING

X7R

Size		0603				0805							1206							
Cap	Code	25V	50V	100V	200V 250V	25V	50V	100V	200V	250V	500V 630V	1KV	25V	50V	100V	200V 250V	500V 630V	1KV	1.5KV	2KV
100pF	101	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
120pF	121	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
150pF	151	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
180pF	181	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
220pF	221	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
270pF	271	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
330pF	331	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
390pF	391	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
470pF	471	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
560pF	561	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
680pF	681	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
820pF	821	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
1000pF	102	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	C	C
1200pF	122	S	S	S	B	X	X	X	X	X	X	X	X	X	X	C	C	C	E	E
1500pF	152	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	E
1800pF	182	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	E
2200pF	222	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	E
2700pF	272	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	E
3300pF	332	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	E
3900pF	392	S	S	S	B	X	X	X	X	X	X	C	X	X	X	C	C	C	E	
4700pF	472	S	S	S	B	X	X	X	X	X	C	C	X	X	X	C	C	C	E	
5600pF	562	S	S	S	B	X	X	X	X	X	C	C	X	X	X	C	C	C		
6800pF	682	S	S	S	B	X	X	X	X	X	C	C	X	X	X	C	C	C		
8200pF	822	S	S	S	B	X	X	X	C	C	C	C	X	X	X	C	C	C		
0.010μF	103	S	S	S	B	X	X	X	C	C	C		X	X	X	C	C	C		
0.012μF	123	S	S	B	B	X	X	X	C	C	C		X	X	X	C	C	E		
0.015μF	153	S	S	B	B	X	X	X	C	C	C		X	X	X	C	C	E		
0.018μF	183	S	S	B		X	X	X	C	C	C		X	X	X	C	C	E		
0.022μF	223	S	S	B		X	X	X	C	C	C		X	X	X	C	E	E		
0.027μF	273	S	S	B		X	X	C	C	C			X	X	X	C	E			
0.033μF	333	S	B	B		X	X	C	C	C			X	X	X	E	E			
0.039μF	393	S	B	B		X	X	C	C				X	X	X	E	E			
0.047μF	473	S	B	B		X	X	C	C				X	X	X	E	E			
0.056μF	563	S	B	B		X	X	C	C				X	X	X	E				
0.068μF	683	S	B	B		X	X	C	C				X	X	X	E				
0.082μF	823	S	B			X	X	C					X	X	C	E				
0.10μF	104	S	B			X	X	C					X	X	C	E				
0.12μF	124					X	C	C					X	X	C					
0.15μF	154					C	C	C					M	M	E					
0.18μF	184					C	C	C					M	M	E					
0.22μF	224					C	C	C					M	M	E					
0.27μF	274					C	I	C					M	C	E					
0.33μF	334					C	I	C					M	C	E					
0.39μF	394					C	I	C					J	P	E					
0.47μF	474					C	I	I					J	P	E					
0.56μF	564					C	I						J	P	P					
0.68μF	684					C	I						J	P	P					
0.82μF	824					C	I						J	P	P					
1.0μF	105					C	I						J	P	P					
1.2μF	125												P	P	P					
1.5μF	155												P	P						
1.8μF	185												P	P						
2.2μF	225												P	P						
2.7μF	275																			
3.3μF	335																			
3.9μF	395																			
4.7μF	475																			

MLCC

Chip R

Diode

Coil

■ High Reliability for Industrial Grade

RATING

Size		X7R																									
		1210								1808								1812									
Cap	Code	25V	50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	25V	50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	4KV	
100pF	101																										
120pF	121																										
150pF	151								C	C	C	C	C	C	F												
180pF	181								C	C	C	C	C	C	F												
220pF	221	M	M	M	M	C	C	E	C	C	C	C	C	C	F												
270pF	271	M	M	M	M	C	C	E	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	E	F	
330pF	331	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	E	F	
390pF	391	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	E	F	
470pF	471	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	E	F	
560pF	561	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	E	F	
680pF	681	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	F	F	
820pF	821	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	F	F	
1000pF	102	M	M	M	M	C	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	F	F	
1200pF	122	M	M	M	M	C	C	F	C	C	C	C	C	F	F		C	C	C	C	C	C	C	C	F	G	
1500pF	152	M	M	M	M	C	C	F	C	C	C	C	C	F	F		C	C	C	C	C	C	C	C	F	G	
1800pF	182	M	M	M	M	C	C	F	C	C	C	C	C	F	F		C	C	C	C	C	C	C	E	G	G	
2200pF	222	M	M	M	M	C	C	F	C	C	C	C	C	F	F		C	C	C	C	C	C	C	E	G		
2700pF	272	M	M	M	M	C	C	G	C	C	C	C	C	F			C	C	C	C	C	C	C	E	G		
3300pF	332	M	M	M	M	C	C	G	C	C	C	C	C	F			C	C	C	C	C	C	C	F	G		
3900pF	392	M	M	M	M	C	E	G	C	C	C	C	C	F			C	C	C	C	C	C	C	F	G		
4700pF	472	M	M	M	M	C	E	G	C	C	C	C	C	F			C	C	C	C	C	C	C	F	G		
5600pF	562	M	M	M	M	C	E	G	C	C	C	F	F	F			C	C	C	C	C	C	C	G			
6800pF	682	M	M	M	M	C	E	G	C	C	F	F	F				C	C	C	C	C	C	C	G			
8200pF	822	M	M	M	M	C	E	G	C	C	F	F					C	C	C	C	C	C	C	G			
0.010μF	103	M	M	M	M	C	E		C	C	C	F	F				C	C	C	C	C	C	E	G			
0.012μF	123	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	F				
0.015μF	153	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	F				
0.018μF	183	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	G				
0.022μF	223	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	G				
0.027μF	273	M	M	M	M	E	E		E	E	E	F	F				C	C	C	C	C	C	G				
0.033μF	333	M	M	M	M	E	E		E	E	E	F	F				C	C	C	C	C	C	G				
0.039μF	393	M	M	M	M	E	F		E	E	E	F	F				C	C	C	C	C	C	G				
0.047μF	473	M	M	M	M	C	E	G		E	E	E	F	F			C	C	C	C	C	C	G				
0.056μF	563	M	M	M	C	E	G		E	E	E	F	F				C	C	C	C	F	F	G				
0.068μF	683	M	M	M	E	F	G		E	E	E	F					C	C	C	C	F	F	G				
0.082μF	823	M	M	M	E	G			E	E	E	F					C	C	C	C	F	F	G				
0.10μF	104	M	M	M	E	G			E	E	E						C	C	E	C	F	F	G				
0.12μF	124	M	M	M	E	G			E	E	E						C	C	E	C	G	G					
0.15μF	154	M	M	C	G	G			E	E	E						C	C	E	F	G	G					
0.18μF	184	M	M	C	G				E	E	F						C	C	E	F	G	G					
0.22μF	224	M	M	C	G				E	E							C	C	E	F	G	G					
0.27μF	274	M	M	E	G				F	F							C	C	E	F	G						
0.33μF	334	M	C	E	G				F	F							C	C	E	F	G						
0.39μF	394	M	C	G	G				F	F							C	C	E	F	G						
0.47μF	474	M	C	G	G				F								C	C	E	F	G						
0.56μF	564	C	C	G	G				F								C	C	F	G							
0.68μF	684	C	C	F	G				F								C	F	F	G							
0.82μF	824	C	C	F													C	F	F	G							
1.0μF	105	C	C	F													C	F	F	G							
1.2μF	125	C	G	G													C	F	F								
1.5μF	155	E	G	G													C	F	F								
1.8μF	185	E	G	G													E	F	F								
2.2μF	225	E	G	G													E	F	G								
2.7μF	275	E	G	G													F	F	G								
3.3μF	335	E	G	G													F	F	G								
3.9μF	395	F	G														F	F	G								
4.7μF	475	F	G														G	G	G								
5.6μF	565																G	G	G								
6.8μF	685																G	G									
8.2μF	825																G	G									
10.0μF	106																G	G									

MLCC

Chip R

Diode

Coil

High Reliability for Industrial Grade

RATING

X7R

Size	Cap	Code	1825							2220							2225										
			25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV	2KV	3KV	4KV
100pF	101																										
120pF	121																										
150pF	151																										
180pF	181																										
220pF	221																										
270pF	271								F								F										F
330pF	331								F								F										F
390pF	391								F								F										F
470pF	471								F								F										F
560pF	561								F								F										F
680pF	681								F								F										F
820pF	821								F								F										F
1000pF	102	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
1200pF	122	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	G
1500pF	152	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	G
1800pF	182	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	G
2200pF	222	F	F	F	F	F	F	F		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	
2700pF	272	F	F	F	F	F	F	F		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	
3300pF	332	F	F	F	F	F	F	F		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	
3900pF	392	F	F	F	F	F	F	F		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	
4700pF	472	F	F	F	F	F	F	F		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	
5600pF	562	F	F	F	F	F	F	G		F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	G	
6800pF	682	F	F	F	F	F	F	G		F	F	F	F	F	F	G		F	F	F	F	F	F	F	F	G	
8200pF	822	F	F	F	F	F	F	G		F	F	F	F	F	G	G		F	F	F	F	F	F	F	F	G	
0.010µF	103	F	F	F	F	F	F	G		F	F	F	F	F	G	G		F	F	F	F	F	F	F	F	G	
0.012µF	123	F	F	F	F	F	G	H		F	F	F	F	F	G	H		F	F	F	F	F	G	G	G	G	
0.015µF	153	F	F	F	F	F	G	H		F	F	F	F	F	G	H		F	F	F	F	F	G	G	G	G	
0.018µF	183	F	F	F	F	F	G	H		F	F	F	F	F	H	H		F	F	F	F	F	G	G	G	H	
0.022µF	223	F	F	F	F	F	G			F	F	F	F	F	H			F	F	F	F	F	G	G			
0.027µF	273	F	F	F	F	F	H			F	F	F	F	F	H			F	F	F	F	F	G	G			
0.033µF	333	F	F	F	F	F	H			F	F	F	F	F	H			F	F	F	F	F	G	G			
0.039µF	393	F	F	F	F	F	H			F	F	F	F	F	H			F	F	F	F	F	G	H			
0.047µF	473	F	F	F	F	F	H			F	F	F	F	F	H			F	F	F	F	F	G	H			
0.056µF	563	F	F	F	F	F	H			F	F	F	F	F	H			F	F	F	F	F	G	H			
0.068µF	683	F	F	F	F	F				F	F	F	F	G				F	F	F	F	F	G				
0.082µF	823	F	F	F	F	G				F	F	F	F	G				F	F	F	F	F	G				
0.10µF	104	F	F	F	F	G				F	F	F	F	G				F	F	F	F	F	G	G			
0.12µF	124	F	F	F	F	H				F	F	F	F	G				F	F	F	F	H					
0.15µF	154	F	F	F	F	H				F	F	F	F	H				F	F	F	F	H					
0.18µF	184	F	F	F	F	H				F	F	F	F	H				F	F	F	F	H					
0.22µF	224	F	F	F	F	H				F	F	F	F	H				F	F	F	F	H					
0.27µF	274	F	F	F	F	H				F	F	F	F	H				F	F	F	F	H					
0.33µF	334	F	F	F	F	H				F	F	F	F	H				F	F	F	F	H					
0.39µF	394	F	F	F	F					F	F	F	F	H				F	F	F	F	H					
0.47µF	474	F	F	F	F					F	F	F	F					F	F	F	F						
0.56µF	564	F	F	F	G					F	F	F	G					F	F	F	F						
0.68µF	684	F	F	F	G					F	F	F	G					F	F	F	F						
0.82µF	824	F	F	F	H					F	F	F	H					F	F	F	G						
1.0µF	105	F	F	F						F	F	F	H					F	F	F	G						
1.2µF	125	F	F	G						F	F	G						F	F	G	H						
1.5µF	155	F	F	G						F	F	G						F	F	G	H						
1.8µF	185	F	F	G						F	F	G						F	F	G							
2.2µF	225	F	F	G						F	F	G						F	F	G							
2.7µF	275	F	F	H						F	F	H						F	F	G							
3.3µF	335	F	F							F	F							F	F	H							
3.9µF	395	F	F							F	F							F	F	H							
4.7µF	475	F	G							F	F							F	G								
5.6µF	565	G	G							F	F							F	F								
6.8µF	685	G	G							F	F							F	F								
8.2µF	825	G	G							G	G							G	G								
10.0µF	106	G	G							G	G							G	G								
12.0µF	126									H								H									
15.0µF	156									H								H									
18.0µF	186									H								H									
22.0µF	226									H								H									

MLCC

Chip R

Diode

Coil

■ Anti-Bend (Soft termination) Capacitor Series

FEATURES

- High performance to withstanding 5mm of substrate bending test guarantee.
- A wide selection of sizes is available (0603 to 2225).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).
- Reduction in PCB bend failure.
- High reliability and stability.
- RoHS & HALOGEN compliant

APPLICATION

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.
- DC to DC converter


PART NUMBER

FP	21	X	225	K	101	E	G	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
Anti-bend	15 0402(1005)	N COG(NPO)	106=10x10 [∧] 6	J= ± 5%	6R3=6.3V	E=	Reference	G=RoHS
General	18 0603 (1608)	X X7R	=10μF	K=± 10 %	100=10V	Tape and 7" Reel,	Thickness	Compliant
Purpose	21 0805 (2012)		100=10x10 [∧] 0	M=± 20 %	160=16V	Embossed Tape	Description	
	31 1206 (3216)		=10pF		250=25V	P=		
	32 1210 (3225)		R47=0.47pF		500=50V	Tape and 7" Reel,		
	42 1808 (4520)		OR5=0.5pF		101=100V	Paper Tape		
	43 1812 (4532)				201=200V	L=		
	46 1825 (4563)				251=250V	Tape and 13" Reel,		
	55 2220 (5750)				501=500V	Embossed		
	56 2225 (5763)				631=630V	G=		
					102=1000V	Tape and 13"Reel,		
					152=1500V	Paper Tape		
					202=2000V			
					302=3000V			
					402=4000V			

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1KV, 1.5KV, 2KV, 3KV, 4KV	6.3V, 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1KV, 1.5KV, 2KV, 3KV, 4KV
Capacitance range	0.1pF ~ 330nF	100pF ~ 22μF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%) K (±10%) M (±20%)
Tan δ	Cap. Rang Q Spec. Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	Cap. Volt. D.F. Spec. 25V ≤ 3.5% ≥ 50V ≤ 2.5%
Capacitance & Tan δ Test Condition	Cap. Rang Test Condition Cap≤1000pF 1.0±0.2Vrms, 1.0MHz±10% Cap>1000pF, 1.0±0.2Vrms, 1.0kHz±10%	Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement. Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.
Insulation resistance	≥100GΩ or R·C≥500Ω·F whichever is smaller	≥10GΩ or R·C≥100Ω·F whichever is smaller
Operating temperature	- 55 to + 125°C	
Temperature coefficient	±30ppm / °C	±15%
Termination	Cu / Ag polymer / Ni / Sn (lead-free termination)	

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _b (mm)
0402 (1005)	1.00±0.10	0.50±0.10	Reference Thickness Description	0.25±0.05/-0.10
0603 (1608)	1.60±0.20	0.80±0.15		0.40±0.15
0805 (2012)	2.10±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.30±0.30	1.60±0.20		0.60±0.20
1210 (3225)	3.30±0.40	2.50±0.30		0.75±0.25
1808 (4520)	4.60±0.50	2.00±0.20		0.75±0.35
1812 (4532)	4.60±0.50	3.20±0.30		0.75±0.35
1825 (4563)	4.60±0.50	6.30±0.40		0.75±0.35
2220 (5750)	5.70±0.50	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.50	6.30±0.40		0.85±0.35

■ Anti-Bend (Soft termination) Capacitor Series

RATING

NPO

Size	Cap	Code	0402				0603				0805							1206										
			10V	16V	25V 50V	100V	10V	16V	25V 50V	100V	200V 250V	10V	16V	25V 50V	100V	200V	250V	500V 630V	1KV	10V 16V	25V	50V	100V	200V	250V	500V	630V	1KV
0.1pF	OR1	K	K	K																								
0.2pF	OR2	K	K	K																								
0.3pF	OR3	K	K	K		S	S	S																				
0.4pF	OR4	K	K	K		S	S	S																				
0.5pF	OR5	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C										
1.0pF	1R0	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C			X							
1.2pF	1R2	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X				X		
1.5pF	1R5	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
1.8pF	1R8	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
2pF	2R0	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
2.2pF	2R2	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
2.7pF	2R7	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
3.3pF	3R3	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
3.9pF	3R9	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
4.7pF	4R7	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
5.0pF	5R0	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
5.6pF	5R6	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
6.8pF	6R8	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
8.2pF	8R2	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
10pF	100	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
12pF	120	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
15pF	150	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
18pF	180	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
22pF	220	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
27pF	270	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	X	
33pF	330	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	M	
39pF	390	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	M	
47pF	470	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	M	
56pF	560	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	C	
68pF	680	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	A	C	X	X	X	X	X	X	X	X	C	
82pF	820	K	K	K	K	S	S	S	S	S	A	A	A	A	A	A	X	C	X	X	X	X	X	X	X	X	C	
100pF	101	K	K	K	K	S	S	S	S	S	A	A	A	A	A	X	X	C	X	X	X	X	X	X	X	X	C	
120pF	121	K	K	K	K	S	S	S	S	S	A	A	A	A	A	X	X	C	X	X	X	X	X	X	X	X	E	
150pF	151	K	K	K	K	S	S	S	S	S	A	A	A	A	X	X	C	C	X	X	X	X	X	X	X	X	E	
180pF	181	K	K	K	K	S	S	S	S	S	A	A	A	A	X	X	C	C	X	X	X	X	X	X	X	X	E	
220pF	221	K	K	K	K	S	S	S	S	S	A	A	A	A	C	C	C	C	X	X	X	X	X	X	X	X	E	
270pF	271	K	K	K		S	S	S	S	B	A	A	A	A	C	C	C	C	X	X	X	X	X	M	M	M	E	
330pF	331	K	K	K		S	S	S	S	B	A	A	A	A	C	C	C	C	X	X	X	X	X	M	M	M	E	
390pF	391	K	K	K		S	S	S	S	B	X	X	X	X	C	C	C	C	X	X	X	X	X	M	M	M	E	
470pF	471	K	K	K		S	S	S	S	B	X	X	X	X	C	C	I		X	X	X	X	M	M	M	M	E	
560pF	561	K	K	K		S	S	S	S	B	X	X	X	X	C	C	I		X	X	X	X	M	C	C	C	E	
680pF	681	K	K	K		S	S	S	S	B	X	X	X	X	C	C	I		X	X	X	X	M	C	C	C	E	
820pF	821	K	K	K		S	B	S	S	B	X	X	X	X	C	C	I		X	X	X	X	M	E	E	E	E	
1000pF	102	K	K	K		S	B	S	S		X	X	X	X	C	C	I		X	X	X	X	M	E	E	E	E	
1200pF	122					B	B	B			X	X	X	X	C	C	I		X	X	X	X	M	E	E	E	E	
1500pF	152					B	B	B			X	X	X	X	C	C	I		X	X	X	X	C	E	E	E		
1800pF	182					B	B	B			X	X	X	X	C	C	I		X	X	X	X	C	E	E	E		
2200pF	222					B	B	B			X	X	X	X	C	C	I		X	X	X	X	C	E	E	E		
2700pF	272					B		B			C	C	C	C	C	C			X	X	X	X	C	E	E	E		
3300pF	332					B		B			C	C	C	C	C	C			X	X	X	X	C	E	E	E		
3900pF	392										C	C	C	C					X	X	X	X	C	E	E	E		
4700pF	472										C	C	C	C					X	X	X	X	C	E	E	E		
5600pF	562										C	C	C	C					X	X	X	X	E	E	E	E		
6800pF	682										C	C	C	C					M	M	M	M	E	E	E			
8200pF	822										C	C	C						C	C	C	C	E	E				
0.010μF	103										C	C	C						C	C	C	C	E	E				
0.012μF	123																		P	P	P	P						
0.015μF	153																		P	P	P	P						
0.018μF	183																		P	P	P	P						
0.022μF	223																		P	P	P	P						
0.027μF	273																		P	P	P							
0.033μF	333																		P	P	P							
0.039μF	393																		P	P	P							

MLCC

Chip R

Diode

Coil

■ Anti-Bend (Soft termination) Capacitor Series

RATING

NPO

Size		1210																1808					1812									
Cap	Code	10V 16V	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	10V 16V	25V	50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV					
2.2pF	2R2									C	C	C	C	C	C	C	C															
2.7pF	2R7									C	C	C	C	C	C	C	C															
3.3pF	3R3									C	C	C	C	C	C	C	C															
3.9pF	3R9									C	C	C	C	C	C	C	C															
4.7pF	4R7									C	C	C	C	C	C	C	C															
5.0pF	5R0									C	C	C	C	C	C	C	C															
5.6pF	5R6									C	C	C	C	C	C	C	C															
6.8pF	6R8									C	C	C	C	C	C	C	C															
8.2pF	8R2									C	C	C	C	C	C	C	C															
10pF	100	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
12pF	120	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
15pF	150	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
18pF	180	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
22pF	220	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
27pF	270	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
33pF	330	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
39pF	390	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
47pF	470	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
56pF	560	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
68pF	680	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
82pF	820	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C				
100pF	101	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C				
120pF	121	M	M	M	M	M	M	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C				
150pF	151	M	M	M	M	M	M	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	C	C	C				
180pF	181	M	M	M	M	M	M	C	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	C	C	E				
220pF	221	M	M	M	M	M	M	E	E	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	C	C	E				
270pF	271	M	M	M	M	M	M	E	E	C	C	C	F	F	F	F	F	C	C	C	C	C	C	C	C	C	E	E				
330pF	331	M	M	M	M	M	M	E	E	C	C	C	F	F	F	F	F	C	C	C	C	C	C	C	C	C	E	E				
390pF	391	M	M	M	M	M	M	E	E	C	C	C	F	F	F	F	F	C	C	C	C	C	C	C	C	C	E	E				
470pF	471	M	M	M	M	M	M	E	E	C	C	C	F	F	F	F	F	C	C	C	C	C	C	C	C	E	E	E				
560pF	561	M	M	M	M	M	M	E	E	C	C	C	F	F	F	F	F	C	C	C	C	C	C	C	C	E	E	E				
680pF	681	M	M	M	M	M	M	E		C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	E	F				
820pF	821	M	M	M	M	M	M	E		C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	E	G				
1000pF	102	M	M	M	C	C	C	E		C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	E	G				
1200pF	122	M	M	M	C	C	C			C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	E					
1500pF	152	M	M	M	C	C	C			C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	E					
1800pF	182	M	M	M	C	C	C			C	C	C	F	F	F	F		C	C	C	C	C	C	C	C	E	F					
2200pF	222	M	M	M	C	C	C			C	C	C	F	F	F			C	C	C	C	C	C	C	C	E	F					
2700pF	272	M	M	M	C	C	C			C	C	C	F	F	F			C	C	C	C	C	C	C	C	F	G					
3300pF	332	M	M	M	C	C	C			C	C	C	F	F	F			C	C	C	C	C	C	C	C	F	G					
3900pF	392	M	M	M	C	C	C			C	C	C	F	F				C	C	C	C	C	C	C	C	C	G					
4700pF	472	M	M	M	E	C				C	C	C	F	F				C	C	C	C	C	C	C	C	C	G					
5600pF	562	M	M	M	E	C				C	C	E	F	F				C	C	C	C	C	C	C	C	C	G					
6800pF	682	M	M	M	E	E				C	C	E	F	F				C	C	C	C	C	C	C	C							
8200pF	822	M	M	M	E	E				C	E	F	F	F				C	C	C	C	C	C	C	C							
0.010μF	103	M	M	M	E	F				C	E	F	F	F				C	C	C	C	C	C	C								
0.012μF	123	C	C	C	F	F				E	F	F	F					C	C	C	C	E	E	E								
0.015μF	153	C	C	C	G	G				E	F	F						C	C	C	C	E	E	E								
0.018μF	183		F	G	G	G				F	F	F						C	C	C	E	F	F	F								
0.022μF	223		F	G	G					F	F							C	C	C	E	F	F	F								
0.027μF	273		G	G	G					F	F							C	E	E	F	G	G	G								
0.033μF	333		G	G	G					F								C	E	E	F	G	G	G								
0.039μF	393		G	G						F									F	F	G	G	G									
0.047μF	473		G	G															F	F	G	G										
0.056μF	563		G																F	G	G	G										
0.068μF	683		G																F	G	G											
0.082μF	823																		F	G	G											
0.100μF	104																		F	G	G											
0.120μF	124																		F	G												
0.150μF	154																		F	G												

MLCC

Chip R

Diode

Coil

■ Anti-Bend (Soft termination) Capacitor Series

RATING

Size		NPO																								
		1825							2220							2225										
Cap	Code	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	500V	630V	1KV	1.5KV 2KV	3KV	4KV
10pF	100	E	E	E	E	E	E	E	E	E	E	E	E	E		E		E	E	E	E	E	E	E	E	
12pF	120	E	E	E	E	E	E	E	E	E	E	E	E	E		E		E	E	E	E	E	E	E	E	
15pF	150	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E		E	E	E	E	E	E	E	
18pF	180	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E		E	E	E	E	E	E	E	
22pF	220	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E		E	E	E	E	E	E	E	
27pF	270	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
33pF	330	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
39pF	390	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
47pF	470	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
56pF	560	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
68pF	680	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
82pF	820	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
100pF	101	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
120pF	121	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
150pF	151	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
180pF	181	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	F
220pF	221	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	F
270pF	271	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	E	E	E	E	E	E	E	E	G
330pF	331	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	E	E	E	E	E	E	E	E	E
390pF	391	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
470pF	471	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
560pF	561	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
680pF	681	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
820pF	821	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
1000pF	102	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
1200pF	122	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E	E
1500pF	152	E	E	E	E	E	E	F	E	E	E	E	E	E	F		E	E	E	E	E	E	E	E	E	E
1800pF	182	E	E	E	E	E	E	F	E	E	E	E	E	E	G		E	E	E	E	E	E	E	E	F	
2200pF	222	E	E	E	E	E	E	G	E	E	E	E	E	E	G		E	E	E	E	E	E	E	E	F	
2700pF	272	E	E	E	E	E	E	G	E	E	E	E	E	E	G		E	E	E	E	E	E	E	E	G	
3300pF	332	E	E	E	E	E	E		E	E	E	E	E	E			E	E	E	E	E	E	E	E	G	
3900pF	392	E	E	E	E	E	E		E	E	E	E	E	E	E			E	E	E	E	E	E	E	E	
4700pF	472	E	E	E	E	E	F		E	E	E	E	E	F			E	E	E	E	E	E	E	E	E	
5600pF	562	E	E	E	E	F	F		E	E	E	E	E	F	F			E	E	E	E	E	E	F		
6800pF	682	E	E	E	E	F	G		E	E	E	E	E	F	G			E	E	E	E	E	E	F		
8200pF	822	E	E	E	E	G	G		E	E	E	E	E	G	G			E	E	E	E	E	F	G		
0.010μF	103	E	E	E	E	G			E	E	E	E	E	G				E	E	E	E	E	G	G		
0.012μF	123	E	E	E	E	G			E	E	E	E	E	G				E	E	E	E	E	G			
0.015μF	153	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.018μF	183	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.022μF	223	E	E	E	E				E	E	E	E	E					E	E	E	E	E				
0.027μF	273	E	E	E	F				E	E	E	E	E					E	E	E	E	E				
0.033μF	333	E	E	E	F				E	E	F	F	F					E	E	E	E	E				
0.039μF	393	E	E	F	G				E	E	F	F	F					E	E	F	F	F				
0.047μF	473	E	E	F	G				E	E	G	G	G					E	E	F	F	F				
0.056μF	563	E	F	G	G				E	F	G	G	G					E	E	G	G	G				
0.068μF	683	E	F	G	G				E	F	G	G						E	F	G	G	G				
0.082μF	823	F	G	G					F	G	G							F	F	G	G	G				
0.100μF	104	G	G	G					G	G	G							F	G	G	G					
0.120μF	124	G	G						G	G								G	G	G						
0.150μF	154	G							G	G								G	G	G						
0.180μF	184								G	G								G	G							
0.220μF	224								G									G	G							
0.270μF	274								G									G								
0.330μF	334																	G								

MLCC

Chip R

Diode

Coil

■ Anti-Bend (Soft termination) Capacitor Series

RATING

X7R

Size	0402					0603					0805							1206																
	Cap	Code	6.3V	10V 16V	25V	50V	100V	6.3V	10V 16V	25V	50V	100V	200V 250V	6.3V	10V	16V	25V	50V	100V	200V	250V	500V 630V	1KV	6.3V	10V	16V	25V	50V	100V	200V 250V	500V 630V	1KV	1.5KV	2KV
100pF	101		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X							C	C	C	C	C
120pF	121		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X							C	C	C	C	C
150pF	151		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
180pF	181		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
220pF	221		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
270pF	271		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
330pF	331		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
390pF	391		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
470pF	471		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
560pF	561		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
680pF	681		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
820pF	821		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
1000pF	102		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	C	C	
1200pF	122		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	X		C	C	C	C	C	C	C	E	E	
1500pF	152		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
1800pF	182		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
2200pF	222		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
2700pF	272		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
3300pF	332		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
3900pF	392		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	X	C		C	C	C	C	C	C	C	E	E	
4700pF	472		K	K	K	K		S	S	S	S	B		C	C	C	C	C	C	C	C	C	C		C	C	C	C	C	C	C	E	E	
5600pF	562		K	K	K			S	S	S	S	B		C	C	C	C	C	C	C	C	C	C		C	C	C	C	C	C	C	E	E	
6800pF	682		K	K	K			S	S	S	S	B		C	C	C	C	C	C	C	C	C	C		C	C	C	C	C	C	C	E	E	
8200pF	822		K	K	K			S	S	S	S	B		C	C	C	C	C	C	C	C	C	C		C	C	C	C	C	C	C			
0.010μF	103		K	K	K			S	S	S	S	B		C	C	C	C	C	C	C	C	C			C	C	C	C	C	C	C			
0.012μF	123		K	K				S	S	S	B	B		C	C	C	C	C	C	C	C	C			C	C	C	C	C	C	E			
0.015μF	153		K	K				S	S	S	B	B		C	C	C	C	C	C	C	C	C			C	C	C	C	C	C	E			
0.018μF	183		K	K				S	S	S	B			C	C	C	C	C	C	C	C	C			C	C	C	C	C	C				
0.022μF	223		K	K				S	S	S	B			C	C	C	C	C	C	C	C	C			C	C	C	C	C	E				
0.027μF	273		K	K				S	S	S	B			C	C	C	C	C	C	C	C	C			C	C	C	C	C	E				
0.033μF	333		K	K				S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E	E				
0.039μF	393		K	K				S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E	E				
0.047μF	473		K	K				S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E	E				
0.056μF	563		K					S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E	E				
0.068μF	683		K					S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E					
0.082μF	823		K					S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E					
0.100μF	104	K	K					S	S	B	B			C	C	C	C	C	C	C	C	C			C	C	C	C	E					
0.120μF	124							S	B					C	C	C	C	I							C	C	C	C						
0.150μF	154							S	B					C	C	C	C	I								M	M	M	M	E				
0.180μF	184							S	B					C	C	C	C	I								M	M	M	M	E				
0.220μF	224							S	B					C	C	C	C	I								M	M	M	M	E				
0.270μF	274						B	B	B					I	I	I	I									M	M	M	C	E				
0.330μF	334							B	B					I	I	I	I									M	M	M	C	E				
0.390μF	394							B	B					I	I	I	I									M	M	J	P	E				
0.470μF	474						B	B	B					I	I	I	I	I								J	J	J	P	E				
0.560μF	564							B	B					I	I	I	I									J	J	J	P	P				
0.680μF	684						B	B						I	I	I										J	J	J	P	P				
0.820μF	824							B						I	I	I										J	J	J	P	P				
1μF	105						B	B						I	I	I	I									J	J	J	P	P				
1.5μF	155													I	I	I										J	J	J	P					
2.20μF	225												I	I	I	I										J	J	J	P	P				
3.3μF	335																									P	P	P						
4.7μF	475														I											P	P	P						
10μF	106																									P	P							

MLCC

Chip R

Diode

Coil

■ Anti-Bend (Soft termination) Capacitor Series

RATING		X7R																															
Size		1210										1808								1812													
Cap	Code	10V	16V	25V	50V	100V	200V 250V	400V	500V 630V	1KV	1.5KV	2KV	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	10V 16V	25V 50V	100V	200V 250V	400V	500V	630V	1KV	1.5KV 2KV	3KV	4KV		
150pF	151											C	C	C	C	C	C	C	C	F													
180pF	181											C	C	C	C	C	C	C	C	F													
220pF	221			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F													
270pF	271			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	F	
330pF	331			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	F	
390pF	391			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	F	
470pF	471			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	F	
560pF	561			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	E	F	C	C	C	C	C	C	C	C	C	C	C	F	
680pF	681			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	E	F	C	C	C	C	C	C	C	C	C	C	C	F	
820pF	821			M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	E	F	C	C	C	C	C	C	C	C	C	C	C	F	
1000pF	102	M	M	M	M	M	M	M	M	M	C	C	C	C	C	C	C	C	F	F	C	C	C	C	C	C	C	C	C	E	F		
1200pF	122	M	M	M	M	M	M	M	M	M	E	E	C	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	F	G		
1500pF	152	M	M	M	M	M	M	M	M	M	E	E	C	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	F	G		
1800pF	182	M	M	M	M	M	M	M	M	M	E	E	C	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	G	G		
2200pF	222	M	M	M	M	M	M	M	M	M	F	F	C	C	C	C	C	E	F		C	C	C	C	C	C	C	C	C	C	G		
2700pF	272	M	M	M	M	M	M	M	M	M	F	F	G	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	C	G		
3300pF	332	M	M	M	M	M	M	M	M	M	F	G	C	C	C	C	C	F			C	C	C	C	C	C	C	C	E	G			
3900pF	392	M	M	M	M	M	M	M	M	M	G	G	C	C	C	C	C	F			C	C	C	C	C	C	C	C	F				
4700pF	472	M	M	M	M	M	M	M	M	M	G	G	C	C	C	C	C	F			C	C	C	C	C	C	C	C	F				
5600pF	562	M	M	M	M	M	M	M	M	M	G	G	C	C	C	C	C	F			C	C	C	C	C	C	C	C	G				
6800pF	682	M	M	M	M	M	M	M	M	M	G	G	C	C	C	C	C	F			C	C	C	C	C	C	C	C	G				
8200pF	822	M	M	M	M	M	M	M	M	M	G	G	C	C	C	C	C				C	C	C	C	C	C	C	C	G				
0.010µF	103	M	M	M	M	M	M	M	M	C			C	C	C	C	C				C	C	C	C	C	C	C	C	G				
0.012µF	123	M	M	M	M	M	M	M	M	C			E	E	E	E	E				C	C	C	C	C	C	C	C					
0.015µF	153	M	M	M	M	M	M	M	M	E			E	E	E	E	E				C	C	C	C	C	C	C	C					
0.018µF	183	M	M	M	M	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	C	E					
0.022µF	223	M	M	M	M	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	C	E					
0.027µF	273	M	M	M	M	M	M	M	M	C	E		E	E	E	F	F				C	C	C	C	C	C	C	F					
0.033µF	333	M	M	M	M	M	M	M	M	E	E		E	E	E	F	F				C	C	C	C	C	C	C	F					
0.039µF	393	M	M	M	M	M	M	M	M	E	F		E	E	E	F	F				C	C	C	C	C	C	C	G					
0.047µF	473	M	M	M	M	M	M	M	M	E	G		E	E	E	F	F				C	C	C	C	C	C	C	G					
0.056µF	563	M	M	M	M	M	M	M	M	E	G		E	E	E	F	F				C	C	C	C	C	E	E	G					
0.068µF	683	M	M	M	M	M	M	M	M	F	G		E	E	E	F					C	C	C	C	C	E	E	G					
0.082µF	823	M	M	M	M	M	M	M	M	F			E	E	E	F					C	C	C	C	C	E	E	G					
0.100µF	104	M	M	M	M	M	M	M	M	F			E	E	E						C	C	C	C	C	E	E	G					
0.120µF	124	M	M	M	M	M	M	M	M	E	G		E	E	E						C	C	C	C	C	F	F						
0.150µF	154	M	M	M	M	M	M	M	M	E	G		E	E	E						C	C	C	C	C	F	F						
0.180µF	184	M	M	M	M	M	M	M	M	E	G		E	E	F						C	C	C	C	C	G	G						
0.220µF	224	M	M	M	M	M	M	M	M	E	G		E	E							C	C	C	C	C	G	G						
0.270µF	274	M	M	M	M	M	M	M	M	E	G		F	F							C	C	C	E	E	G							
0.330µF	334	M	M	M	M	M	M	M	M	E	G		F	F							C	C	C	E	E	G							
0.390µF	394	M	M	M	M	M	M	M	M	E	G		F	F							C	C	C	F	F	G							
0.470µF	474	M	M	M	M	M	M	M	M	E	G		F								C	C	C	F	F	G							
0.560µF	564	C	C	C	C	C	C	C	C	F	G		F								C	C	C	G	G								
0.680µF	684	C	C	C	C	C	C	C	C	F	G		F								C	C	C	G	G								
0.820µF	824	C	C	C	C	C	C	C	C	F											C	C	C	G									
1µF	105	C	C	C	C	C	C	C	C	F											C	C	C	G									
1.2µF	125																					C	C										
1.5µF	155		F	E	G	G																C	C										
1.8µF	185																					E	E										
2.20µF	225		F	E	G	G																E	E										
2.70µF	275																					F	F										
3.3µF	335		F	E	G	G																F	F										
3.9µF	395																					F	F										
4.7µF	475	F	F	F	G																	G	G										
5.6µF	565																					G	G										
6.8µF	685																					G											
8.2µF	825																					G											
10µF	106	F	F																			G											

MLCC

Chip R

Diode

Coil

FP

■ Anti-Bend (Soft termination) Capacitor Series

RATING

X7R

Size	1825																2220								2225							
	Cap	Code	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	400V	500V 630V	1KV	1.5KV 2KV	3KV	4KV	25V 50V	100V	200V 250V	500V 630V	1KV	1.5KV	2KV	3KV	4KV				
270pF	271								F									F											F			
330pF	331								F									F											F			
390pF	391								F									F											F			
470pF	471								F									F											F			
560pF	561								F									F											F			
680pF	681								F									F											F			
820pF	821								F									F											F			
1000pF	102	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F			
1200pF	122	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	F	G			
1500pF	152	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	F	G			
1800pF	182	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	F	G			
2200pF	222	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F				
2700pF	272	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F				
3300pF	332	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F				
3900pF	392	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F				
4700pF	472	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F				
5600pF	562	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	G				
6800pF	682	F	F	F	F	F	F	G		F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F	F	G				
8200pF	822	F	F	F	F	F	F	G		F	F	F	F	F	F	G	G		F	F	F	F	F	F	F	F	F	G				
0.010µF	103	F	F	F	F	F	F	G		F	F	F	F	F	F	G	G		F	F	F	F	F	F	F	F	F	G				
0.012µF	123	F	F	F	F	F	G	H		F	F	F	F	F	F	G	H		F	F	F	F	F	F	G	G	G					
0.015µF	153	F	F	F	F	F	G	H		F	F	F	F	F	F	G	H		F	F	F	F	F	F	G	G	G					
0.018µF	183	F	F	F	F	F	G	H		F	F	F	F	F	F	H	H		F	F	F	F	F	F	G	G	H					
0.022µF	223	F	F	F	F	F	G			F	F	F	F	F	F	H			F	F	F	F	F	F	G	G						
0.027µF	273	F	F	F	F	F	H			F	F	F	F	F	F	H			F	F	F	F	F	F	G	G						
0.033µF	333	F	F	F	F	F	H			F	F	F	F	F	F	H			F	F	F	F	F	F	G	G						
0.039µF	393	F	F	F	F	F	H			F	F	F	F	F	F	H			F	F	F	F	F	F	G	H						
0.047µF	473	F	F	F	F	F	H			F	F	F	F	F	F	H			F	F	F	F	F	F	G	H						
0.056µF	563	F	F	F	F	F	H			F	F	F	F	F	F	H			F	F	F	F	F	F	G	H						
0.068µF	683	F	F	F	F	F				F	F	F	F	F	F				F	F	F	F	F	F	G							
0.082µF	823	F	F	F	F	F				F	F	F	F	F	F				F	F	F	F	F	F	G							
0.100µF	104	F	F	F	F	G				F	F	F	F	F	G				F	F	F	F	F	G	G							
0.120µF	124	F	F	F	F	H				F	F	F	F	F	G				F	F	F	F	F	H								
0.150µF	154	F	F	F	F	H				F	F	F	F	F	H				F	F	F	F	F	H								
0.180µF	184	F	F	F	F	H				F	F	F	F	F	H				F	F	F	F	F	H								
0.220µF	224	F	F	F	F	H				F	F	F	F	F	H				F	F	F	F	F	H								
0.270µF	274	F	F	F	F	H				F	F	F	F	F	H				F	F	F	F	F	H								
0.330µF	334	F	F	F	F	H				F	F	F	F	F	H				F	F	F	F	F	H								
0.390µF	394	F	F	F	F					F	F	F	F	F	H				F	F	F	F	F	H								
0.470µF	474	F	F	F	F					F	F	F	F	F					F	F	F	F	F									
0.560µF	564	F	F	F	G					F	F	F	G	G					F	F	F	F										
0.680µF	684	F	F	F	G					F	F	F	G	G					F	F	F	F										
0.820µF	824	F	F	F	H					F	F	F	H	H					F	F	F	F	G									
1µF	105	F	F	F						F	F	F	H	H					F	F	F	G										
1.2µF	125	F	F	G						F	F	G							F	F	G	H										
1.5µF	155	F	F	G						F	F	G							F	F	G	H										
1.8µF	185	F	F	G						F	F	G							F	F	G											
2.20µF	225	F	F	G						F	F	G							F	F	G											
2.70µF	275	F	F	H						F	F	H							F	F	G											
3.3µF	335	F	F							F	F								F	F	H											
3.9µF	395	F	F							F	F								F	F	H											
4.7µF	475	F	F							F	F								F	F												
5.6µF	565	F	F							F	F								F	F												
6.8µF	685	F	F							F	F								F	F												
8.2µF	825	G	G							G	G								G	G												
10µF	106	G	G							G	G								G	G												
12µF	126									H									H													
15µF	156									H									H													
18µF	186									H									H													
22µF	226									H									H													

MLCC

Chip R

Diode

Coil

■ Safety Certified capacitor series (X1/Y2 & X2)

FEATURES

- Safety standard approval by
EN 132400: 1994+A2+A3+A4 / EN 60384-14: 2013
IEC 60384-14: 2013
UL 60384-14 (Ed 2.0) / UL 62368-1 (2nd Edition)
- Certificate number:
R 500416666 and R 50359148 by TUV
E346791 (FOWX2/8) by UL, E231248 By UL
- HALOGEN compliant

APPLICATION

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- LAN/WLAN interface.
- Modem.
- Power supplies.




PART NUMBER

FK	21	X	102	K	502	E	G	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
FK	06 1206 (3216)	N COG(NPO)	102 =10x10 ² =1000pF	J = ± 5%	252 =2500V	E =	Reference	G =RoHS
Safety X1 & Y2 series	08 1808 (4520)	X X7R	100 =10x10 ⁰ =10pF	K =± 10%	502 =5000V	Tape and 7" Reel, Embossed Tape	Thickness Description	Compliant
FH	21 2211 (5728)			M =± 20%	602 =6000V	P =		
Safety X2 series	20 2220 (5750)					Tape and 7" Reel, Paper Tape		
						L =		
						Tape and 13" Reel, Embossed		
						G =		
						Tape and 13" Reel, Paper Tape		

GENERAL ELECTRICAL DATA

Dielectric	COG (NPO)	X7R	X7R
Size	1808, 1812, 2211	1808, 1812, 2211, 2220	1206
Rated voltage	250VAC		2.5KVDC
Capacitance range*	X1/Y2 Class(Impulse 6KV)	4pF ~ 100pF	X1/Y2 Class 100pF ~ 4.7nF
	X1/Y2 Class(Impulse 5KV)	3pF ~ 720pF	100pF ~ 1000pF
	X2 Class	3pF ~ 1000pF	
Capacitance tolerance	Cap<10pF:	D (± 0.5pF)	J (± 5%)
	Cap≥10pF:	F (± 1%), G (± 2%), J (± 5%), K (± 10%), M (± 20%)	K (± 10%) M (± 20%)
Tan δ * (Tangent of loss angle)	Cap. Rang	Q Spec.	
	Cap<30pF:	Q≥400+20C	≤2.5%
	Cap≥30pF:	Q≥1000	
Measured at the condition of 30~70% related humidity.			
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature		Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.
	Cap. Rang	Test Condition	
	Cap≤1000pF	1.0±0.2Vrms, 1.0MHz±10%	1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.
Cap>1000pF	1.0±0.2Vrms, 1.0kHz±10%		
Insulation resistance at 500Vdc for 60 seconds	≥100GΩ or R • C≥1000 whichever is smaller		≥10GΩ or R • C≥500Ω-F whichever is smaller
Operating temperature	- 55°C to + 125°C		
Capacitance characteristic	± 30ppm / °C		± 15%
Termination	(Cu or Ag) / Ni / Sn (lead-free termination)		

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _B min (mm)
1206 (3216)	3.30±0.30	1.60±0.20		0.5±0.25
1808 (4520)	4.50+0.5/-0.3	2.00±0.25	Reference	0.75±0.35
1812 (4532)	4.50+0.5/-0.3	3.20±0.40	Thickness	0.75±0.35
2211 (5728)	5.70±0.40	2.80±0.30	Description	0.85±0.35
2220 (5750)	5.70±0.40	5.00±0.40		

MLCC

Chip R

Diode

Coil

FK-FH

■ Safety Certified capacitor series (X1/Y2 & X2)

RATING

Class		X1/Y2 (FK Series)								X2 (FH Series)						
Rated Voltage		250Vac														2.5KVdc
Dielectric		COG				X7R				COG		X7R			X7R	
Cap. (pF)	Size	1808	1812	2211	2211	1808	1812	2211	2220	1808	1812	1808	1812	2220	1206	
	Impulse	5KV		6KV		5KV				2.5KV						---
3	3R0	D								D						
3.3	3R3	D								D						
4	4R0	D		F	F					D						
4.7	4R7	D		F	F					D						
5	5R0	D		F	F					D						
5.6	5R6	D		F	F					D						
6.8	6R8	D		F	F					D						
8.2	8R2	D		F	F					D						
9	9R0	D		F	F					D						
10	100	D	C	F	F					D	C					
12	120	D	C	F	F					D	C					
15	150	D	C	F	F					D	C					
18	180	D	C	F	F					D	C					
22	220	D	C	F	F					D	C					
27	270	D	C	F	F					D	C					
33	330	D	C	F	F					D	C					
39	390	E	C	F	F					E	C					
47	470	E	C	F	F					E	C					
56	560	E	C	F	F					E	C					
68	680	E	C	F	G					E	C					
82	820	E	C	F	G					E	C					
100	101	F	C	F	H	E				F	C				C	
120	121	F	C	G		E				F	C				C	
130	131	F	C	G		E		E		F	C				C	
150	151	F	C	G		E	E	E		F	C	E			C	
160	161	F	C	G		E	E	E	F	F	C	E			C	
180	181	F	C	G		E	E	E	F	F	C	E			C	
220	221	F	F	G		E	E	E	F	F	C	E			C	
270	271	F	F	G		F	E	E	F	F	C	E	E		C	
300	301		F	G		F	E	E	F	F	C	E	E		C	
330	331		F	G		F	E	E	F	F	C	E	E		C	
390	391		F	G		F	E	E	F	F	C	E	E		C	
470	471		F	G		F	E	F	F	F	C	E	E		C	
560	561			G		F	E	F	F	F	C	E	E		C	
680	681			G		F	F	F	F	F	F	E	E		C	
720	721			G		F	F	F	F	F	F	E	E		C	
820	821					F	F	F	F	F	F	E	E		C	
1000	102					F	G	G	F	F	F	F	E		C	
1200	122							G	G			F	E			
1500	152							G	G			F	F			
1800	182							G	G			F	F			
2200	222							G	G			F	G			
2700	272								G				G			
3300	332								G				G			
3900	392								G				G			
4700	472								G				G			
5600	562												G			
6800	682															
8200	822															
10000	103													G		
12000	123													G		
15000	153													G		
18000	183													G		
22000	223													H		

MLCC

Chip R

Diode

Coil

■ Extra High Voltage Capacitor Series (≥1KV)

FEATURES

- Special interior design offers high voltage rating in a given case size.
- High reliability and stability.
- RoHS compliant.

APPLICATION

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- LAN/WLAN interface.
- Modem.
- Power supplies.


PART NUMBER

FV	31	X	103	K	102	E	C	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
High Voltage Series	21 0805 (2012)	N COG(NPO)	102=10x10 [∧] 2	J= ± 5%	102=1000V	E= Tape and 7" Reel, Embossed Tape	Reference Thickness Description	G=RoHS Compliant
	31 1206 (3216)	X X7R	=1000pF	K= ± 10%	152=1500V			
	32 1210 (3225)		100=10x10 [∧] 0	M= ± 20%	202=2000V	P= Tape and 7" Reel, Paper Tape L= Tape and 13" Reel, Embossed G= Tape and 13"Reel, Paper Tape		
	High voltage application with ≥ 1KVdc	42 1808 (4520)		=10pF	302=3000V			
	43 1812 (4532)				402=4000V			
	46 1825 (4563)							
	52 2211 (5728)							
	55 2220 (5750)							
	56 2225 (5763)							

GENERAL ELECTRICAL DATA

Dielectric	COG(NPO)	X7R	
Size	0805,1206, 1210, 1808, 1812, 1825, 2220, 2225	0805,1206, 1210, 1808, 1812, 1825, 2211, 2220, 2225	
Rated voltage (WVDC)	1KV, 1.5KV, 2KV, 3KV,4KV	1KV, 1.5KV, 2KV, 3KV,4KV	
Capacitance range*	1.5pf ~ 12nF	100pF ~ 390nF	
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF)	J (±5%)	
	5pF<Cap<10pF: C (±0.25pF), D (±0.5pF)	K (±10%)	
	Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	M (±20%)	
Tan δ *	Cap. Rang	Q Spec.	
	Cap<30pF:	Q≥400+20C	≤2.5%
	Cap≥30pF:	Q≥1000	
Measured at the condition of 30~70% related humidity.			
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature		Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.
	Cap. Rang	Test Condition	
	Cap≤1000pF	1.0±0.2Vrms, 1.0MHz±10%	Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.
	Cap > 1000pF	1.0±0.2Vrms, 1.0kHz±10%	
Insulation resistance	≥100GΩ or R • C ≥ 500Ω-F whichever is smaller	≥10GΩ or R • C ≥ 100Ω-F whichever is smaller	
Operating temperature	-55 to +125°C		
Temperature coefficient	±30ppm / °C	±15%	
Termination	Ag (or Cu)/Ni/Sn (lead-free termination)		

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _B min (mm)
0805 (2012)	2.10±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.30±0.30	1.60±0.20		0.60±0.20
1210 (3225)	3.30±0.40	2.50±0.30		0.75±0.35
1808 (4520)	4.50+0.50/-0.30	2.00±0.25	Reference Thickness	0.75±0.35
1812 (4532)	4.50+0.50/-0.30	3.20±0.30		0.75±0.35
1825 (4563)	4.50+0.50/-0.30	6.30±0.40	Description	0.75±0.35
2211 (5728)	5.70±0.40	2.80±0.30		0.85±0.35
2220 (5750)	5.70±0.40	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.50	6.30±0.40		0.85±0.35

MLCC

Chip R

Diode

Coil

Extra High Voltage Capacitor Series (≥1KV)

RATING

COG(NPO)

Size	0805	1206			1210				1808				1812				1825				2220					2225					
		Cap	Code	1KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	
1.5pF	1R5	C	X	X	X																										
1.8pF	1R8	C	X	X	X																										
2.2pF	2R2	C	X	X	X						C	C	C	C																	
2.7pF	2R7	C	X	X	X						C	C	C	C																	
3.3pF	3R3	C	X	X	X						C	C	C	C																	
3.9pF	3R9	C	X	X	X						C	C	C	C																	
4.7pF	4R7	C	X	X	X						C	C	C	C																	
5pF	5R0	C	X	X	X						C	C	C	C																	
5.6pF	5R6	C	X	X	X						C	C	C	C																	
6.8pF	6R8	C	X	X	X						C	C	C	C																	
8.2pF	8R2	C	X	X	X						C	C	C	C																	
10pF	100	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
12pF	120	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
15pF	150	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
18pF	180	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
22pF	220	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
27pF	270	C	X	X	X	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
33pF	330	C	X	M	M	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
39pF	390	C	X	M	M	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
47pF	470	C	M	M	M	E	M	M	M	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
56pF	560	C	M	C	C	E	M	C	C	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
68pF	680	C	M	C	C	E	M	C	C	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
82pF	820	C	C	C	C	E	M	C	C	F	C	C	C	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
100pF	101	C	C	C	C		C	C	C	F	C	C	C	F	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
120pF	121	C	C	E	E		C	C	C	F	C	C	C	F	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
150pF	151	C	C	E	E		C	E	E	F	C	F	F	F	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	
180pF	181	C	E	E	E		C	E	E	F	C	F	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	
220pF	221	C	E	E	E		E	E	E	F	C	F	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	
270pF	271	C	E	E	E		E	E	E	G	F	F	F	F	C	F	F	F	F	F	F	F	F	F	F	F	G	F	F	G	
330pF	331	C	E	E	E		E	E	E		F	F	F	F	F	C	F	F	F	F	F	F	F	F	F	G	G	F	F	F	
390pF	391		E	E	E		E	E	E		F	F	F	F	C	F	F	F	F	F	F	F	F	F	F	G		F	F	F	
470pF	471		E	E	E		E	E	E		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	
560pF	561		E				E	E	E		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	
680pF	681		E				E	E	E		F	F	F		F	F	F	F	F	F	F	G	F	F	F	G		F	F	F	
820pF	821		E				E	E	E		F	F	F		F	F	F	G	F	F	F	G	F	F	F	G		F	G	G	
1000pF	102		E				E	F	F		F	F	F		F	F	F	G	F	F	F	G	F	F	F	G		F	G	G	
1200pF	122		E				E	F	F		F	F	F		F	F	F		F	F	F	G	G	G	G	G		F	G	G	
1500pF	152						F	G	G		F	F	F		F	F	F		F	G	G	G	G	G	G	G		F	G	G	
1800pF	182						G	G	G		F	F	F		F	F	F		F	G	G	G	G	G	G	G		F	G	G	
2200pF	222						G				F				F	F	F		F	G	G	G	G	G	G	G		F	G	G	
2700pF	272						G				F				F	G	G		F	G	G	G	G	G	G	G		F	G	G	
3300pF	332						G				F				F	G	G		F	G	G		G	G	G			F	G	G	
3900pF	392						G								G				G	G	G		G	G	G			F	G	G	
4700pF	472														G				G	G	G		G	G	G			F	G	G	
5600pF	562														G				G	G	G		G	G	G			G	G	G	
6800pF	682														G				G	G	G		G	G	G			G	G	G	
8200pF	822														G				G	G	G		G	G	G			G	G	G	
0.01μF	103														G				G				G					G	G	G	
0.012μF	123														G				G				G					G			

MLCC

Chip R

Diode

Coil

■ Extra High Voltage Capacitor Series (≥1KV)

RATING

X7R

Size	0805	1206				1210			1808					1812					1825					2211				2220					2225				
Cap	Code	1KV	1KV	1.5KV	2KV	1KV	1.5KV	2KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV	1KV	1.5KV	2KV	3KV	4KV		
100pF	101	X	C	C	C																																
120pF	121	X	C	C	C																																
150pF	151	X	C	C	C				C	C	C	C	F																								
180pF	181	X	C	C	C				C	C	C	C	F																								
220pF	221	X	C	C	C	C	E	E	C	C	C	C	F																								
270pF	271	X	C	C	C	C	E	E	C	C	C	C	F	C	C	C	E	F						F	F	F					F					F	
330pF	331	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F						F	F	F					F					F	
390pF	391	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F						F	F	F					F					F	
470pF	471	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F						F	F	F					F					F	
560pF	561	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	E	F						F	F	F					F					F	
680pF	681	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F						F	F	F					F					F	
820pF	821	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F						F	F	F					F					F	
1000pF	102	X	C	C	C	C	E	E	C	C	C	F	F	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
1200pF	122	X	C	E	E	C	F	F	C	F	F	F		C	C	C	F	G	F	F	F	F	G	G	G	F	F	F	F	G	F	F	F	F	G		
1500pF	152	C	C	E	E	C	F	F	C	F	F	F		C	C	C	F	G	F	F	F	F	G	G	G	F	F	F	F	G	F	F	F	F	G		
1800pF	182	C	C	E	E	C	F	F	C	F	F	F		C	E	E	G	G	F	F	F	F	G	G	G	F	F	F	F	G	F	F	F	F	G		
2200pF	222	C	C	E	E	C	F	F	C	F	F	F		C	E	E	G		F	F	F	F	G		F	F	F	F		F	F	F	F		F		
2700pF	272	C	C	E	E	C	G	G	C	F	F			C	E	E	G		F	F	F	F	G		F	F	F	F		F	F	F	F		F		
3300pF	332	C	C	E	E	C	G	G	C	F	F			C	F	F	G		F	F	F	F	G		F	F	F	F		F	F	F	F		F		
3900pF	392	C	C	E		E	G	G	C	F	F			C	F	F	G		F	F	F	F			F	F	F	F		F	F	F	F		F		
4700pF	472	C	C	E		E	G	G	C	F	F			C	F	F	G		F	F	F	F			F	F	F	F		F	F	F	F		F		
5600pF	562	C	C			E	G	G	F	F	F			C	G	G			F	F	F	G			F	F	F	F		F	F	F	G		F		
6800pF	682	C	C			E	G	G	F	F	F			C	G	G			F	F	F	G			F	F	F	G		F	F	F	G		F		
8200pF	822	C	C			E	G	G	F					C	G	G			F	F	F	G			F	G	G	G		F	F	F	G		F		
0.010μF	103		C			E			F					E	G	G			F	F	F	G			F	G	G	G		F	F	F	G		F		
0.012μF	123		E			E			F					F					F	G	G	H			F	G	G	H		F	G	G	G		F		
0.015μF	153		E			E			F					F					F	G	G	H			F	G	G	H		F	G	G	G		F		
0.018μF	183		E			E			F					G					F	G	G	H			F	H	H	H		F	G	G	H		F		
0.022μF	223		E			E			F					G					F	G	G				F	H	H		F	G	G				F		
0.027μF	273					E			F					G					F	H	H				F	H	H		F	G	G				F		
0.033μF	333					E			F					G					F	H	H				F	H	H		F	G	G				F		
0.039μF	393					F			F					G					F	H	H				F	H	H		F	G	H				F		
0.047μF	473					G			F					G					F	H	H				F	H	H		F	G	H				F		
0.056μF	563					G			F					G					F	H	H				F	H	H		F	G	H				F		
0.068μF	683					G								G					F						G				F	G					F		
0.082μF	823													G					G						G				F	G					F		
0.10μF	104													G					G						G				G	G					G		
0.12μF	124																		H						G				H						H		
0.15μF	154																		H						H				H						H		
0.18μF	184																		H						H				H							H	
0.22μF	224																		H						H				H							H	
0.27μF	274																		H						H				H							H	
0.33μF	334																		H						H				H							H	
0.39μF	394																		H						H				H							H	

MLCC

Chip R

Diode

Coil

FM

Mid-Voltage Capacitor Series (100V~630V)

FEATURES

- High Voltage in a given case size.
- High reliability and stability.
- RoHS compliant.

APPLICATION

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- Sunbbers in high frequency power convertors.


PART NUMBER

FM	31	X	471	K	251	P	X	G	X
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code	Control Code
Medium Voltage Series	15 0402 (1005) 18 0603 (1608) 21 0805 (2012) 31 1206 (3216) 32 1210 (3225) 42 1808 (4520) 43 1812 (4532) 46 1825 (4563) 55 2220 (5750) 56 2225 (5763)	N COG(NPO) X X7R F Y5V	102 =10x10 [∧] 2 =1000pF 100 =10x10 [∧] 0 =10pF	J =±5 % K =±10 % M =±20 % Z = -20/+80%	101 =100V 201 =200V 251 =250V 501 =500V 631 =630V	E = Tape and 7" Reel, Embossed Tape P = Tape and 7" Reel, Paper Tape L = Tape and 13" Reel, Embossed G = Tape and 13"Reel, Paper Tape	Reference Thickness Description Q= Surface Coating (Size 1206~2225)	G =RoHS Compliant Compliant Q= Surface Coating (Size 1206~2225)	Blank = Standard X = Special Tolerance

GENERAL ELECTRICAL DATA

Dielectric	COG(NPO)	X7R	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0805, 1206, 1210, 1812
Rated voltage (WVDC)	100V, 200V, 250V, 500V, 630V	100V, 200V, 250V, 500V, 630V	100V, 200V, 250V
Capacitance range*	0.5pF ~ 220nF	100pF ~ 820nF	10nF ~ 680nF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%) K (±10%) M (±20%)	M (±20%) Z (-20/+80%)
Tan δ	Cap. Rang Q Spec. Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	≤2.5%	≤5%
Measured at the condition of 30~70% related humidity.			
Capacitance & Tan δ Test Condition	for 25°C at ambient temperature	Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.	
	Cap. Rang Test Condition	1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.	1.0±0.2Vrms, 1.0kHz±10%, at 20°C ambient temperature.
	Cap≤1000pF 1.0±0.2Vrms, 1.0MHz±10%		
	Cap > 1000pF 1.0±0.2Vrms, 1.0kHz±10%		
Insulation resistance at Ur	≥100GΩ or R·C≥500Ω·F whichever is smaller	≥10GΩ or R·C≥100Ω·F whichever is smaller	
Operating temperature	-55 to +125°C		-25 to +85°C
Capacitance characteristic	±30ppm / °C	±15%	+30/-80%
Termination	Cu (or Ag)/Ni/Sn (lead-free termination)		

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _B min (mm)
0402 (1005)	1.00±0.1	0.50±0.1	Reference Thickness Description	0.25 +0.05/-0.10
0603 (1608)	1.60±0.15	0.80±0.15		0.40±0.15
0805 (2012)	2.00±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.20±0.2	1.60±0.20		0.60±0.20
1210 (3225)	3.20±0.30	2.50±0.30		0.75±0.35
1808 (4520)	4.50±0.40	2.00±0.25		0.75±0.35
1812 (4532)	4.50±0.40	3.20±0.30		0.75±0.35
1825 (4563)	4.50±0.40	6.30±0.40		0.75±0.35
2220 (5750)	5.70±0.40	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.40	6.30±0.40		0.85±0.35

■ Mid-Voltage Capacitor Series (100V~630V)

RATING

COG(NPO)

Size	Code	0402			0603			0805					1206					1210					1808						
		100V	200V	250V	100V	200V	250V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V		
0.5pF	0R5	N	N	N	S	S	S	A	A	A	A	A																	
1pF	1R0	N	N	N	S	S	S	A	A	A	A	A																	
1.2pF	1R2	N	N	N	S	S	S	A	A	A	A	A	X			X													
1.5pF	1R5	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X												
1.8pF	1R8	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X												
2.2pF	2R2	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
2.7pF	2R7	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
3.3pF	3R3	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
3.9pF	3R9	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
4.7pF	4R7	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
5.6pF	5R6	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
6.8pF	6R8	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
8.2pF	8R2	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X						C	C	C	C	C		
10pF	100	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
12pF	120	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
15pF	150	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
18pF	180	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
22pF	220	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
27pF	270	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
33pF	330	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
39pF	390	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
47pF	470	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
56pF	560	N	N	N	S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
68pF	680	N	N		S	S	S	A	A	A	A	A	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
82pF	820	N	N		S	S	S	A	A	A	X	X	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
100pF	101	N	N		S	S	S	A	A	X	X	X	X	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
120pF	121	N			S	S	S	A	A	X	C	C	C	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
150pF	151	N			S	S	S	A	X	X	C	C	C	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
180pF	181	N			S	S	S	A	X	C	C	C	C	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
220pF	221	N			S	S	S	A	C	C	C	C	C	X	X	X	X	M	M	M	M	M	C	C	C	C	C		
270pF	271				S	B	B	A	C	C	C	C	C	X	X	M	M	M	M	M	M	M	C	C	C	F	F		
330pF	331				S	B	B	A	C	C	C	C	C	X	X	M	M	M	M	M	M	M	C	C	C	F	F		
390pF	391				S	B	B	X	C	C	C	C	C	X	X	M	M	M	M	M	M	M	C	C	C	F	F		
470pF	471				S	B	B	X	C	C	C	C	C	X	M	M	M	M	M	M	M	M	C	C	C	F	F		
560pF	561				S	B	B	X	C	C	C	C	C	X	M	C	C	C	M	M	M	M	C	C	C	F	F		
680pF	681				S	B	B	X	C	C	C	C	C	X	M	C	C	C	M	M	M	M	C	C	C	F	F		
820pF	821				S	B	B	X	C	C	C	C	C	X	M	E	E	E	E	M	M	M	M	C	C	C	F	F	
1000pF	102				S			X	C	C	C	C	C	X	M	E	E	E	M	C	C	C	C	C	C	C	F	F	
1200pF	122				B			X	C	C	C	C	C	X	M	E	E	E	M	C	C	C	C	C	C	C	F	F	
1500pF	152				B			X	C	C	C	C	C	X	C	E	E	E	M	C	C	C	C	C	C	C	F	F	
1800pF	182							X	C	C	C	C	C	X	C	E	E	E	M	C	C	C	C	C	C	C	F	F	
2200pF	222							X	C	C	C	C	C	X	C	E	E	E	M	C	C	C	C	C	C	C	F	F	
2700pF	272							C	C	C				X	C	E	E	E	M	C	C	C	C	C	C	C	F	F	
3300pF	332							C	C	C				X	C	E	E	E	M	C	C	C	C	C	C	C	F	F	
3900pF	392							C						X	E	E	E	E	M	C	C	C	C	C	C	C	F	F	
4700pF	472							C						X	E	E	E	E	C	C	C	C	C	C	C	C	F	F	
5600pF	562							C						X	E	E	E	E	C	C	C	C	C	C	E	E	F	F	
6800pF	682							C						M	E	E	E		E	E	E	E	E	C	E	E	F	F	
8200pF	822													C	E	E			E	E	E	E	E	E	F	F	F	F	
0.010μF	103													C	E	E			E	F	F	F	F	E	F	F	F	F	
0.012μF	123													P					E	F	F	F	F	F	F	F	F		
0.015μF	153													P					F	G	G	G	G	F	F	F			
0.018μF	183													P					G	G	G	G		F	F	F			
0.022μF	223													P					G	G	G			F					
0.027μF	273																		G	G	G			F					
0.033μF	333													T					G	G	G								
0.039μF	393																		G										
0.047μF	473																		G										
0.056μF	563																		G										
0.068μF	683																												
0.082μF	823																												
0.10μF	104																												

MLCC

Chip R

Diode

Coil

Mid-Voltage Capacitor Series (100V~630V)

RATING

COG(NPO)

Size		1812					1825					2220					2225					
Cap	Code	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	
10pF	100	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
12pF	120	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
15pF	150	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
18pF	180	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
22pF	220	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
27pF	270	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
33pF	330	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
39pF	390	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
47pF	470	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
56pF	560	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
68pF	680	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
82pF	820	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
100pF	101	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
120pF	121	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
150pF	151	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
180pF	181	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
220pF	221	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
270pF	271	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
330pF	331	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
390pF	391	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
470pF	471	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
560pF	561	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
680pF	681	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
820pF	821	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
1000pF	102	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
1200pF	122	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
1500pF	152	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
1800pF	182	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
2200pF	222	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
2700pF	272	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
3300pF	332	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
3900pF	392	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
4700pF	472	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
5600pF	562	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
6800pF	682	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
8200pF	822	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.010μF	103	C	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.012μF	123	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.015μF	153	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.018μF	183	E	F	F	F	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.022μF	223	E	F	F	F	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
0.027μF	273	F	G	G	G	G	E	E	E	F	F	E	E	E	F	F	E	E	E	E	E	E
0.033μF	333	F	G	G	G	G	E	E	E	F	F	E	F	F	F	F	E	E	E	E	E	E
0.039μF	393	G	G	G	G		E	F	F	G	G	E	F	F	G	G	E	F	F	F	F	F
0.047μF	473	G	G	G			E	F	F	G	G	E	G	G	G	G	E	F	F	F	F	F
0.056μF	563	G	G	G			F	G	G	G	G	F	G	G	G	G	E	G	G	G	G	G
0.068μF	683	G					F	G	G	G	G	F	G	G	G		F	G	G	G	G	G
0.082μF	823	G					G	G	G	G		G	G	G			F	G	G	G	G	G
0.10μF	104	G					G	G	G			G	G	G			G	G	G	G		
0.12μF	124						G	G	G			G					G	G	G			
0.15μF	154						G					G					G	G	G			
0.18μF	184						G					G					G					
0.22μF	224																G					

MLCC

Chip R

Diode

Coil

Mid-Voltage Capacitor Series (100V~630V)

RATING

X7R

Size		0402				0603				0805					1206					1210					1808	
Cap	Code	100V	100V	200V	250V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	500V	630V				
100pF	101	N	S	B	B	X	X	X	X	X	X	C	C	C	C											
120pF	121	N	S	B	B	X	X	X	X	X	X	C	C	C	C											
150pF	151	N	S	B	B	X	X	X	X	X	X	C	C	C	C						C	C				
180pF	181	N	S	B	B	X	X	X	X	X	X	C	C	C	C						C	C				
220pF	221	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
270pF	271	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
330pF	331	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
390pF	391	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
470pF	471	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
560pF	561	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
680pF	681	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
820pF	821	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
1000pF	102	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
1200pF	122	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
1500pF	152	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
1800pF	182	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
2200pF	222	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
2700pF	272	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
3300pF	332	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
3900pF	392	N	S	B	B	X	X	X	X	X	X	C	C	C	C	M	M	M	C	C	C	C				
4700pF	472	N	S	B	B	X	X	X	C	C	X	C	C	C	C	M	M	M	C	C	C	C				
5600pF	562		S	B	B	X	X	X	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
6800pF	682		S	B	B	X	X	X	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
8200pF	822		S	B	B	X	C	C	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
0.010μF	103		S	B	B	X	C	C	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
0.012μF	123		B	B	B	X	C	C	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
0.015μF	153		B	B	B	X	C	C	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
0.018μF	183		B			X	C	C	C	C	X	C	C	C	C	M	M	M	C	C	F	F				
0.022μF	223		B			X	C	C	C	C	X	C	C	E	E	M	M	M	C	C	F	F				
0.027μF	273		B			C	C	C			X	C	C	E	E	M	M	M	E	E	F	F				
0.033μF	333		B			C	C	C			X	E	E	E	E	M	M	M	E	E	F	F				
0.039μF	393		B			C	C	C			X	E	E	E	E	M	M	M	E	E	F	F				
0.047μF	473		B			C	C	C			X	E	E	E	E	M	C	C	E	E	F	F				
0.056μF	563		B			C	C	C			X	E	E	E	E	M	C	C	E	E	F	F				
0.068μF	683		B			C	C	C			X	E	E			M	E	E	F	F	F	F				
0.082μF	823		B			C	C				C	E	E			M	E	E	G	G	F	F				
0.10μF	104		B			C	C				C	E	E			M	E	E	G	G						
0.12μF	124					C					C					M	E	E	G	G						
0.15μF	154					C					E					C	G	G	G	G						
0.18μF	184					C					E					C	G	G								
0.22μF	224					C					E					C	G	G								
0.27μF	274					C					E					E	G	G								
0.33μF	334					C					E					E	G	G								
0.39μF	394					C					E					G	G	G								
0.47μF	474					I					E					G	G	G								
0.56μF	564										P					G	G	G								
0.68μF	684										P					F	G	G								
0.82μF	824										P					F										
1.00μF	105																									
1.20μF	125																									
1.50μF	155																									
1.80μF	185																									
2.20μF	225																									
2.70μF	275																									
3.30μF	335																									
3.90μF	395																									
4.70μF	475																									
5.60μF	565																									

MLCC

Chip R

Diode

Coil

FM

Mid-Voltage Capacitor Series (100V~630V)

RATING

X7R

Size		1812					1825					2220					2225				
Cap	Code	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V	100V	200V	250V	500V	630V
100pF	101																				
120pF	121																				
150pF	151																				
180pF	181																				
220pF	221																				
270pF	271	C	C	C	C	C															
330pF	331	C	C	C	C	C															
390pF	391	C	C	C	C	C															
470pF	471	C	C	C	C	C															
560pF	561	C	C	C	C	C															
680pF	681	C	C	C	C	C															
820pF	821	C	C	C	C	C															
1000pF	102	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
1200pF	122	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
1500pF	152	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
1800pF	182	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
2200pF	222	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
2700pF	272	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
3300pF	332	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
3900pF	392	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
4700pF	472	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
5600pF	562	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
6800pF	682	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
8200pF	822	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.010μF	103	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.012μF	123	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.015μF	153	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.018μF	183	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.022μF	223	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.027μF	273	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.033μF	333	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.039μF	393	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.047μF	473	C	C	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.056μF	563	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.068μF	683	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.082μF	823	C	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.10μF	104	E	C	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.12μF	124	E	C	C	G	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.15μF	154	E	F	F	G	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.18μF	184	E	F	F	G	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.22μF	224	E	F	F	G	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.27μF	274	E	F	F	G		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.33μF	334	E	F	F	G		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.39μF	394	E	F	F	G		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.47μF	474	E	F	F	G		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
0.56μF	564	F	G	G			F	F	F	G	G	F	F	F	G	G	F	F	F	F	F
0.68μF	684	F	G	G			F	F	F	G	G	F	F	F	G	G	F	F	F	F	F
0.82μF	824	F	G	G			F	F	F	H	H	F	F	F	H	H	F	F	F	G	G
1.00μF	105																				
1.20μF	125																				
1.50μF	155																				
1.80μF	185																				
2.20μF	225																				
2.70μF	275																				
3.30μF	335																				
3.90μF	395																				
4.70μF	475																				
5.60μF	565																				
6.80μF	685																				
8.20μF	825																				
10.0μF	106																				

MLCC

Chip R

Diode

Coil

■ Mid-Voltage Capacitor Series (100V~630V)

RATING

Y5V

Size		0805			1206			1210			1812		
Cap	Code	100V	200V	250V	100V	200V	250V	100V	200V	250V	100V	200V	250V
0.01μF	103	B	B	B	B	B	B	C	C	C	D	D	D
0.015μF	153	B	B	B	B	B	B	C	C	C	D	D	D
0.022μF	223	B	B	B	B	B	B	C	C	C	D	D	D
0.033μF	333	B	B	B	B	B	B	C	C	C	D	D	D
0.047μF	473	B	B	B	B	B	B	C	C	C	D	D	D
0.068μF	683	B	B	B	B	B	B	C	C	C	D	D	D
0.1μF	104	B			B	B	B	C	C	C	D	D	D
0.15μF	154				C	C	C	C	C	C	D	D	D
0.22μF	224				C			C			D	D	D
0.33μF	334							C			D	D	D
0.47μF	474										D	D	D
0.68μF	684										D	D	D
1μF	105												

MLCC

Chip R

Diode

Coil

High capacitance capacitor series ($\geq 1\mu\text{F}$)

FEATURES

- Realize high capacitance in small sizes.
- Capacitor with lead-free termination (pure Tin).
- RoHS compliant.
- HALOGEM compliant.
- Surface mount suited for wave and reflow soldering.
- High reliability and no polarity.
- Excellent in high frequency characteristic.

APPLICATION

- Digital circuit coupling or decoupling applications.
- For high frequency and high-density type power suppliers.
- For bypassing.
- Ideal for smoothing circuits.
- Suitable for DC-DC converter, personal computer and peripherals, telecommunication and general electronic equipment.


PART NUMBER

FS	21	X	226	K	101	E	G	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
High Capacitance Series	03 0201 (0603) 15 0402 (1005) 18 0603 (1608) 21 0805 (2012)	B X5R X X7R F Y5V	106 = 10×10^6 =10 μF	K = $\pm 10\%$ M = $\pm 20\%$ Z = -20/+80%	6R3 =6.3V 100 =10V 160 =16V 250 =25V 500 =50V 101 =100V 201 =200V 251 =250V 501 =500V 631 =630V	E = Tape and 7" Reel, Embossed Tape P = Tape and 7" Reel, Paper Tape L = Tape and 13" Reel, Embossed G = Tape and 13"Reel, Paper Tape	Reference Thickness Description	G =RoHS Compliant
Rated voltage $\leq 250\text{Vdc}$	31 1206 (3216) 32 1210 (3225)							
Capacitance $\geq 1.0\mu\text{F}$ Series Product	43 1812 (4532) 46 1825 (4563) 55 2220 (5750) 56 2225 (5763)							

GENERAL ELECTRICAL DATA

Dielectric	X7R	X5R	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1812, 1825, 2220, 2225	0201, 0402, 0603, 0805, 1206, 1210	0402, 0603, 0805, 1206, 1210, 1812
Capacitance range*	1 μF to 47 μF	1 μF to 220 μF	1 μF to 100 μF
Capacitance tolerance**	K ($\pm 10\%$), M ($\pm 20\%$)		Z (-20/+80%)
Rated voltage (WVDC)	6.3V, 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V		
Tan δ*	Please, refer to our sales spec.		
Operating temperature	-55 to +125°C	-55 to +85°C	-25 to +85°C
Capacitance characteristic	$\pm 15\%$		+30/-80%
Termination	Cu (or Ag) Ni/Sn (lead-free termination)		

DIMENSIONS



Size inch (mm)	L (mm)	W (mm)	T (mm) code	M _B min (mm)
0201 (0603)	0.60 \pm 0.03	0.30 \pm 0.03		0.15 \pm 0.05
0402 (1005)	1.00 \pm 0.10	0.50 \pm 0.10		0.25+0.05/-0.10
0603 (1608)	1.60 \pm 0.15	0.80 \pm 0.15		0.40 \pm 0.15
0805 (2012)	2.00 \pm 0.20	1.25 \pm 0.20		0.50 \pm 0.20
1206 (3216)	3.20 \pm 0.20	1.60 \pm 0.20	Reference Thickness Description	0.60 \pm 0.20
1210 (3225)	3.20 \pm 0.30	2.50 \pm 0.30		0.75 \pm 0.35
1812 (4532)	4.50 \pm 0.40	3.20 \pm 0.30		0.75 \pm 0.35
1825 (4563)	4.50 \pm 0.40	6.30 \pm 0.40		0.75 \pm 0.35
2220 (5750)	5.70 \pm 0.40	5.00 \pm 0.40		0.85 \pm 0.35
2225 (5763)	5.70 \pm 0.40	6.30 \pm 0.40		0.85 \pm 0.35

High capacitance capacitor series ($\geq 1\mu\text{F}$)

RATING

Size		X7R																																	
Cap(pF)	Code	0402						0603					0805					1206						1210						1812					
		6.3V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	100V	6.3V	10V	16V	25V	35V	50V	100V	10V	16V	25V	50V	100V	200V	250V			
1.0	105	N	B	B	B	B	B		C	C	C	C	I		J	J	J	P	P		C	C	C	C	F	C	C	C	F	F	G	G			
1.2	125																P	P	P					G	G			C	F	F					
1.5	155								I	I	I				J	J	J	P	P			E	E	G	G			C	F	F					
1.8	185																P	P						G	G			E	F	F					
2.2	225		B	B	B			I	I	I	I		I	J	J	J	P	P	P			E	E	G	G			E	F	G					
2.7	275																							G	G			F	F	G					
3.3	335														P	P	P	P				E	E	G	G			F	F	G					
3.9	395																											F	F	G					
4.7	475		B					I	I	I	I			P	P	P	P	P				F	F	F	G	G		G	G	G					
5.6	565																											G	G	G					
6.8	685																											G	G						
8.2	825																											G	G						
10.0	106							I	I	I				P	P	P	P					F	F	F	G			G	G						
12.0	126													P	P	P																			
15.0	156																																		
18.0	186																																		
22.0	226																						G	G	G										
47.0	476																						G	G											

Size		X7R																			
Cap(pF)	Code	1825					2220								2225						
		25V	50V	100V	200V	250V	25V	50V	100V	200V	250V	500V	630V	25V	50V	100V	200V	250V	500V	630V	
1.0	105	G	F	F	F	F	F	F	F	F	F	H	H	F	F	F	F	F	G	G	
1.2	125		F	F	G	G	F	F	F	G	G			F	F	F	G	G	H	H	
1.5	155		F	F	G	G	F	F	F	G	G			F	F	F	G	G	H	H	
1.8	185		F	F	G	G	F	F	F	G	G			F	F	F	G	G			
2.2	225		F	F	G	G	F	F	F	G	G			F	F	F	G	G			
2.7	275		F	F	H	H	F	F	F	H	H			F	F	F	G	G			
3.3	335		F	F			F	F	F					F	F	F	H	H			
3.9	395		F	F			F	F	F					F	F	F	H	H			
4.7	475		F	G			F	F	F					F	F	F					
5.6	565		G	G			F	F	F					F	F	F					
6.8	685		G	G			F	F	F					F	F	F					
8.2	825		G	G			G	G	G					G	G	G					
10.0	106		G	G			G	G	G					G	G	G					
12.0	126						H							H							
15.0	156						H							H							
18.0	186						H							H							
22.0	226						H	H						H	H						
47.0	476																				

MLCC

Chip R

Diode

Coil

■ High capacitance capacitor series ($\geq 1\mu\text{F}$)

RATING

X5R

Size	0201			0402				0603					0805					1206					1210											
Cap(pF)	Code	6.3V	10V	16V	4V	6.3V	10V	16V	25V	4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	35V	50V
1.0	105	L	L	L		N	N	N	N		B	B	B	B	B			C	C	C	I							P						
1.5	155										B						I	I	I	I			J	J					F	F				
2.2	225	L	L			N	N	K	K		B	B	B	B	B		I	I	I	I	I		J	J	P	P			F	F				
3.3	335										B	B					I	I	I	I			P	P	P									
4.7	475					K	K	K			B	B	B	B			I	I	I	I	I		P	P	P	P	P		F	F	F			
6.8	685																						P	P										
10.0	106				K	K	K				B	B	B	B	B		I	I	I	I	I		P	P	P	P	P		F	F	F	F	G	G
22.0	226										B	B	B				I	I	I	I			P	P	P	P		G	G	G	G	G		
47.0	476										B	B					I	I					P	P	P			G	G	G	G			
100.0	107																I	I					P					G	G	G				
220.0	227																						P					G	G					

Y5V

Size	0402		0603				0805					1206					1210						1812									
Cap(μF)	code	6.3V	10V	6.3V	10V	16V	25V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	35V	50V	6.3V	10V	16V	25V	35V	50V	10V	16V	25V	50V	100V			
1.0	105	N	N		S	B	B		X	X	C	C		M	M	M		M		M	M	M		M	C	C	C	C	C			
1.5	155				S				C	C				M	M	M				M	M	M			C	C	C	C				
2.2	225			S	S	B			C	C	I	I		M	M	M		J		M	M	M		E	C	C	C	C				
3.3	335								C	C				J	J	J				M	M	M			C	C	C	C				
4.7	475				B	B			C	C	I			J	J	J	J	P		M	M	C		E	C	C	C	C				
6.8	685								I					J	J					M	M	C		F	C	C	C	C				
10.0	106							I	I	I				J	J	P				C	C	E	F	F	C	C	C	F				
22.0	226							I	I					P	P					F	F											
47.0	476																	P		F	F					G						
100.0	107																					G										

MLCC

Chip R

Diode

Coil

Ultra High Q & Low ESR Capacitor Series

FEATURES

- High Q and low ESR performance at high frequency.
- Ultra low capacitance to 0.1pF.
- Can offer high precision tolerance to $\pm 0.05\text{pF}$.
- Quality improvement of telephone calls for low power loss and better performance.
- RoHS compliant.
- HALOGEN compliant.

APPLICATION

- Telecommunication products & equipments: Mobile phone, WLAN, Base station.
- RF module: Power amplifier, VCO.
- Tuners.


PART NUMBER

RF	21	N	101	J	251	C	T
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Ultra High Q & Low ESR	02 01005 (0402) 03 0201 (0603) 11 0505 (1414) 15 0402 (1005) 18 0603 (1608) 21 0805 (2012) 22 1111 (2828)	N =COG (NPO)	0R5 =0.5pF 1R0 =1.0pF 100 =10x10 ⁰ =10pF	A = $\pm 0.05\text{pF}$ B = $\pm 0.1\text{pF}$ C = $\pm 0.25\text{pF}$ D = $\pm 0.5\text{pF}$ F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$	6R3 =6.3V 100 =10V 250 =25V 500 =50V 101 =100V 251 =250V 501 =500V	C =Cu/Ni/Sn	T =7" reeled G =13" reeled

GENERAL ELECTRICAL DATA

Dielectric	NPO
Size	01005, 0201, 0402, 0505, 0603, 0805, 1111
Capacitance*	0.1pF to 1000pF
Capacitance tolerance	Cap $\leq 5\text{pF}$: A ($\pm 0.05\text{pF}$), B ($\pm 0.1\text{pF}$), C ($\pm 0.25\text{pF}$) 5pF<Cap<10pF: B ($\pm 0.1\text{pF}$), C ($\pm 0.25\text{pF}$), D ($\pm 0.5\text{pF}$) Cap $\geq 10\text{pF}$: F ($\pm 1\%$), G ($\pm 2\%$), J ($\pm 5\%$)
Rated voltage (WVDC)	6.3V, 10V, 25V, 50V, 100V, 200, 250V, 500V
Q*	01005, 0201, 0402/25V~50V: Cap<30pF:Q $\geq 400+20\text{C}$; Cap $\geq 30\text{pF}$:Q ≥ 1000 ; 0402/100V~200V, 0603, 0805, 0505, 1111: Cap<30pF:Q $\geq 800+20\text{C}$; Cap $\geq 30\text{pF}$:Q ≥ 1400
Insulation resistance at Ur	$\geq 10\text{G}\Omega$ or RxC $\geq 100\Omega\cdot\text{F}$ whichever is smaller
Operating temperature	-55 to +125 $^{\circ}\text{C}$
Capacitance change	$\pm 30\text{ppm}/^{\circ}\text{C}$; 0201 Cap $\geq 22\text{pF}$, $\pm 60\text{ppm}/^{\circ}\text{C}$
Termination	Ni/Sn (lead-ree termination)

DIMENSIONS



Size	inch (mm)	L (mm)	W (mm)	T (mm)	Symbol	Remark	M _B (mm)
01005 (0402)		0.40 \pm 0.02	0.20 \pm 0.02	0.20 \pm 0.02	V	#	0.10 \pm 0.03
0201 (0603)		0.60 \pm 0.03	0.30 \pm 0.03	0.30 \pm 0.03	L	#	0.15 \pm 0.05
0402 (1005)		1.00 \pm 0.05	0.50 \pm 0.05	0.50 \pm 0.05	N	#	0.25+0.05/-0.10
0603 (1608)		1.60 \pm 0.10	0.80 \pm 0.10	0.80 \pm 0.07	S		0.40 \pm 0.15
		1.60+0.15/-0.10	0.80+0.15/-0.10	0.50 \pm 0.10	H		
0805 (2012)		2.00 \pm 0.15	1.25 \pm 0.10	0.60 \pm 0.10	A		0.50 \pm 0.20
		2.00 \pm 0.20	1.25 \pm 0.20	0.85 \pm 0.10	T		
0505 (1414)		1.40+0.38/-0.25	1.40 \pm 0.38	1.15 \pm 0.15	J	#	0.25+0.25/-0.13
1111 (2828)		2.79+0.51/-0.25	2.79 \pm 0.38	≤ 1.78	G	#	0.38 \pm 0.25

MLCC

Chip R

Diode

Coil

■ Ultra High Q & Low ESR Capacitor Series

RATING

NPO

Size	01005			0201				0402				0603			0805				0505			1111					Tolerance			
	Cap	Code	16V	25V	6.3V	10V	25V	50V	100V	25V	50V	100V	200V	50V	100V	250V	50V	100V	250V	500V	50V	100V	250V	50V	100V	200V		250V	500V	
0.1pF	OR1			L	L	L	L	L	N	N	N	N	H	H	H															A, B
0.2pF	OR2	V	V	L	L	L	L	L	N	N	N	N	H	H	H	A	A	A	A											A, B
0.3pF	OR3	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T											A, B
0.4pF	OR4	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B
0.5pF	OR5	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
0.6pF	OR6	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
0.7pF	OR7	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
0.75pF	R75	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
0.8pF	OR8	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
0.9pF	OR9	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
1.0pF	1R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
1.2pF	1R2	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
1.5pF	1R5	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
1.8pF	1R8	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J								A, B, C
2.0pF	2R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
2.2pF	2R2	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
2.7pF	2R7	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
3.0pF	3R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
3.3pF	3R3	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
3.9pF	3R9	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
4.0pF	4R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
4.7pF	4R7	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
5.0pF	5R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		A, B, C
5.6pF	5R6	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
6.0pF	6R0	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
6.8pF	6R8	V		L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
7.0pF	7R0	V		L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
8.0pF	8R0	V		L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
8.2pF	8R2	V		L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
9.0pF	9R0	V		L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		B, C, D
10pF	100	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
12pF	120	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
15pF	150	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
18pF	180	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
20pF	200	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
22pF	220	V	V	L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
24pF	240			L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
27pF	270			L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
30pF	300			L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
33pF	330			L	L	L	L	L	N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
36pF	360								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
39pF	390								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
43pF	430								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
47pF	470								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
56pF	560								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
68pF	680								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
82pF	820								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
100pF	101								N	N	N	N	S	S	S	T	T	T	T	J	J	J	G	G	G	G	G	G		F, G, J
120pF	120															T	T	T					G	G	G	G	G	G		F, G, J
150pF	150															T	T	T					G	G	G	G	G	G		F, G, J
180pF	180															T	T	T					G	G	G	G	G	G		F, G, J
220pF	221															T	T	T					G	G	G	G	G	G		F, G, J
270pF	271																						G	G	G	G	G	G		F, G, J
330pF	331																						G	G	G	G	G	G		F, G, J
390pF	391																						G	G	G	G	G	G		F, G, J
470pF	471																						G	G	G	G	G	G		F, G, J
560pF	561																						G	G	G	G	G	G		F, G, J
680pF	681																						G	G	G	G	G	G		F, G, J
820pF	821																						G	G	G	G	G	G		F, G, J
1000pF	102																						G	G	G	G	G	G		F, G, J

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other Data, please contact local representative.

General purpose capacitor series

FEATURES

- A wide selection of sizes is available (0201 to 2225).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).
- RoHS & HALOGEN compliant.

APPLICATION

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.
- DC to DC converter.

PART NUMBER

FN	21	X	471	K	500	P	X	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Packaging	Thickness	Control Code
General Purpose product $\leq 50V_{DC}$	03 0201 (0603) 15 0402 (1005) 18 0603 (1608) 21 0805 (2012) 31 1206 (3216) 32 1210 (3225) 42 1808 (4520) 43 1812 (4532) 46 1825 (4563) 55 2220 (5750) 56 2225 (5763)	N COG(NPO) X X7R B X5R F Y5V	102 = 10×10^2 =1000pF 100 = 10×10^0 =10pF	J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ Z = -0/+80%	6R3 =6.3V 100 =10V 160 =16V 250 =25V 500 =50V	E = Tape and 7" Reel, Embossed Tape P = Tape and 7" Reel, Paper Tape L = Tape and 13" Reel, Embossed G = Tape and 13" Reel, Paper Tape	Reference Thickness Description	G =RoHS Compliant

GENERAL ELECTRICAL DATA

Dielectric	COG(NPO)	X7R	Y5V	X5R
Size	0201 to 2225	0201 to 2225	0201 to 1812	0201 to 0603
Capacitance range*	0.1pF ~ 390nF	100pF ~ 820nF	10nF ~ 680nF	100pF ~ 820nF
Capacitance tolerance	J ($\pm 5\%$) K ($\pm 10\%$)	J ($\pm 5\%$) K ($\pm 10\%$) M ($\pm 20\%$)	Z (-20/+80%)	J ($\pm 5\%$) K ($\pm 10\%$) M ($\pm 20\%$)
Rated voltage (WVDC)	10V, 16V, 25V, 50V	6.3V, 10V, 16V, 25V, 50V	6.3V, 10V, 16V, 25V, 50V	6.3V, 4V, 10V, 16V, 25V, 50V
Tan δ *	Cap<30pF: Q \geq 400+20C Cap \geq 30pF: Q \geq 1000		Note 1	
Operating temperature		-55 to +125°C	-25 to +85°C	-55 to +85°C
Capacitance characteristic	± 30 ppm	$\pm 15\%$	± 30 /-80%	$\pm 15\%$
Termination		Cu (or Ag)/Ni/Sn (lead-free termination)		

* Measured at the condition of 30~70% related humidity.

COG: Apply $1.0 \pm 0.2V_{rms}$, 1.0MHz $\pm 10\%$ for Cap \leq 1000pF and $1.0 \pm 0.2V_{rms}$, 1.0kHz $\pm 10\%$ for Cap $>$ 1000pF, 25°C at ambient temperature.

X7R: Apply $1.0 \pm 0.2V_{rms}$, 1.0kHz $\pm 10\%$, at 25°C ambient temperature.

Y5V: Apply $1.0 \pm 0.2V_{rms}$, 1.0kHz $\pm 10\%$, at 20°C ambient temperature.

Note 1:


X7R/X5R

Rated vol.	D.F.	Exception of D.F.
$\geq 50V$	$\leq 2.5\%$	$\leq 3\%$ 0603 \geq 0.047 μF ; 0805 \geq 0.18 μF , 1206 \geq 0.47 μF
25V	$\leq 3.5\%$	$\leq 5\%$ $\leq 7\%$ 0603 \geq 0.33 μF
16V	$\leq 3.5\%$	$\leq 5\%$ $\leq 10\%$ 0402 \geq 0.033 μF ; 0603 \geq 0.15 μF ; 0805 \geq 0.68 μF ; 1206 \geq 2.2 μF 1210 \geq 22 μF ; 0603 \geq 0.68 μF
10V	$\leq 5.0\%$	$\leq 10\%$ 0603 \geq 1 μF ; 0805 \geq 2.2 μF

Y5V

Rated vol.	D.F.	Exception of D.F.
$\geq 50V$	$\leq 5.0\%$	7.0% 0603 \geq 0.1 μF ; 0805 \geq 0.47 μF
25V	$\leq 5.0\%$	$\leq 7\%$ $\leq 9\%$ 0402 \geq 0.047 μF ; 0603 \geq 0.1 μF ; 0805 \geq 0.33 μF ; 1206 \geq 1 μF 0402 \geq 0.068 μF ; 0603 \geq 0.47 μF
16V (C<1.0 μF)	$\leq 7.0\%$	$\leq 9\%$ 0402 \geq 0.068 μF ; 0603 \geq 0.68 μF
16V (C \geq 1.0 μF)	$\leq 9.0\%$	$\leq 12.5\%$ 0805 \geq 4.7 μF ; 1206 \geq 10 μF ; 1210 \geq 22 μF ; 1812 \geq 47 μF
10V	$\leq 12.5\%$	---

DIMENSIONS



Size	inch (mm)	L (mm)	W (mm)	T (mm)	code	M _B min (mm)
0201 (0603)		0.60 \pm 0.03	0.30 \pm 0.03			0.15 \pm 0.05
0402 (1005)		1.00 \pm 0.10	0.50 \pm 0.10			0.25+0.05/-0.10
0603 (1608)		1.60 \pm 0.15	0.80 \pm 0.15			0.40 \pm 0.15
0805 (2012)		2.00 \pm 0.20	1.25 \pm 0.20			0.50 \pm 0.20
1206 (3216)		3.20 \pm 0.20	1.60 \pm 0.20			0.60 \pm 0.20
1210 (3225)		3.20 \pm 0.30	2.50 \pm 0.30			0.75 \pm 0.35
1808 (4520)		4.50 \pm 0.40	2.00 \pm 0.25			0.75 \pm 0.35
1812 (4532)		4.50 \pm 0.40	3.20 \pm 0.30			0.75 \pm 0.35
1825 (4563)		4.50 \pm 0.40	6.30 \pm 0.40			0.75 \pm 0.35
2220 (5750)		5.70 \pm 0.40	5.00 \pm 0.40			0.85 \pm 0.35
2225 (5763)		5.70 \pm 0.40	6.30 \pm 0.40			0.85 \pm 0.35
					Reference Thickness Description	

MLCC

Chip R

Diode

Coil

■ General purpose capacitor series

RATING

X5R

Size		0201						0402					0603				
Cap	Code	4V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
100pF	101				L	L	L										
120pF	121				L	L	L										
150pF	151				L	L	L										
180pF	181				L	L	L										
220pF	221				L	L	L										
270pF	271				L	L	L										
330pF	331				L	L	L										
390pF	391				L	L	L										
470pF	471				L	L	L										
560pF	561				L	L	L										
680pF	681				L	L	L										
820pF	821				L	L	L										
1000pF	102			L	L	L	L										
1500pF	152			L	L	L											
2200pF	222			L	L	L											
2700pF	272			L	L	L											
3300pF	332			L	L	L											
4700pF	472			L	L	L											
6800pF	682			L	L	L											
0.01µF	103		L	L	L	L	L										
0.015µF	153		L	L													
0.022µF	223		L	L													
0.027µF	273		L	L						N							
0.033µF	333		L	L						N							
0.039µF	393		L	L						N							
0.047µF	473		L	L				N	N	N							
0.056µF	563		L	L				N	N	N							
0.068µF	683		L	L				N	N	N							
0.082µF	823		L	L				N	N	N							
0.1µF	104		L	L	L	L		N	N	N	N					S	
0.15µF	154							N	N	N	N						
0.22µF	224		L	L	L			N	N	N	N	N	B	B	B	B	B
0.27µF	274								N					B	B	B	
0.33µF	334		L					N	N				B	B	B	B	
0.39µF	394								N					B	B	B	
0.47µF	474	L	L					N	N	K	K	K	B	B	B	B	B
0.68µF	684							N	N				B	B	B	B	
0.82µF	824												B	B	B	B	

Y5V

Size		0201		0402				0603					0805				1206				1210				1812			
Cap	Code	6.3V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
0.010µF	103			N	N	N	N		S	S	S	S	A	A	A	A	X	X	X	X								
0.015µF	153			N	N	N	N		S	S	S	S	A	A	A	A	X	X	X	X								
0.022µF	223			N	N	N	N		S	S	S	S	A	A	A	A	X	X	X	X								
0.033µF	333			N	N	N	N		S	S	S	S	A	A	A	A	X	X	X	X								
0.047µF	473			N	N	N			S	S	S	S	A	A	A	A	X	X	X	X								
0.068µF	683			N	N	N			S	S	S	S	A	A	A	A	X	X	X	X								
0.10µF	104	L		N	N	N			S	S	S	S	A	A	A	A	X	X	X	X	M	M	M	M	C	C	C	C
0.15µF	154			N	N				S	S	S	S	A	A	A	A	X	X	X	X	M	M	M	M	C	C	C	C
0.22µF	224		N	N	N			S	S	S	S	S	A	A	A	A	X	X	X	X	M	M	M	M	C	C	C	C
0.33µF	334		N	N	N				S	S	S	B	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C
0.47µF	474		N	N	N				S	S	B	B	X	X	X	X/C	X	X	X	X	M	M	M	M	C	C	C	C
0.68µF	684		N						S	B	B		X	X	C	C	X	X	X	X	M	M	M	M	C	C	C	C

MLCC


Chip R

Diode

Coil

CAP ARRAY

0612/0508 size Cap Array Series



FEATURES

- High density mounting due to mounting space saving.
- Mounting cost saving.
- Increased throughput.
- RoHS compliant.
- HALOGEM compliant.

APPLICATION

- For use as a bypass for digital and analog signal line noise.
- Computer motherboards and peripherals.
- The other common electronic circuits.

PART NUMBER

Y	4C	3	X	103	K	500	C	T
Series	Cap. Nr.	Termination pitch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Y=Capacitor array	4C=4xCap	3=0.03" pitch 2=0.02" pitch	N=COG(NPO) X=X7R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point.	J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point.	C=Cu/Ni/Sn	T=7" reeled

Y4C3: 4x0603 (0612)
Y4C2: 4x0402 (0508)

eg.:
103=10x10³
=10,000pF
=10nF

eg.:
100=10 VDC
160=16 VDC
250=25 VDC
500=50 VDC
101=100 VDC

GENERAL ELECTRICAL DATA

	Dielectric	NPO	X7R	Y5V
Size		4x0402 0508 (1220)	4x0603 0612 (1632)	4x0402 0508 (1220)
Capacitance*		10pF ~ 270pF	10pF ~ 470pF	100pF ~ 100nF
Capacitance tolerance**		J (±5%), K (±10%)	K (±10%), M (±20%)	Z (-20/+80%)
Rated voltage (WVDC)		25, 50V, 100V	10V, 16V, 25V, 50V	16V, 25V, 50V
Q/Tan δ *		Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	Ur=50V, ≤2.5% Ur=25V & 16V, ≤3.5% Ur=10V, ≤5.0%	Ur=50V, ≤5% Ur=16V, ≤7%
Insulation resistance at Ur		≥10GΩ	≥10GΩ or RxC≥500ΩxF whichever is less	
Operating temperature			-55 to +125°C	-25 to +85°C
Capacitance characteristic		±30ppm	±15%	+30/-80%
Termination			Ni/Sn (lead-free termination)	

* Measured at 30~70% related humidity.


NPO: Apply 1.0±0.2Vrms, 1.0MHz±10% at the conditions of 25°C ambient temperature.

X7R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at the conditions of 25°C ambient temperature.

Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at the conditions of 20°C ambient temperature.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

DIMENSIONS



Size	inch (mm)	L (mm)	W (mm)	T (mm)	Symbol	S (mm)	BW (mm)	P (mm)
4x0402 0508 (1220)		2.00±0.15	1.25±0.15	0.85±0.10	T	0.20±0.10	0.25±0.10	0.50±0.10
4x0603 0612 (1632)		3.20±0.15	1.60±0.15	0.80±0.10	B	0.30±0.20	0.40±0.15	0.80±0.15

MLCC

Chip R

Diode

Coil

CAP ARRAY

■ 0612/0508 size Cap Array Series

RATING

Dielectric		NPO	X7R				NPO		X7R			Y5V	
Size		4 x 0402						4 x 0603					
Cap	Code	25V 50V 100V	10V	16V	25V	50V	25V	50V 100V	16V	25V	50V	16V	50V
10pF	100	T					B	B					
15pF	150	T					B	B					
22pF	220	T					B	B					
33pF	330	T					B	B					
47pF	470	T					B	B					
68pF	680	T					B	B					
100pF	101	T					B	B					
150pF	151	T					B	B					
180pF	181	T					B	B		B	B		
220pF	221	T					B	B		B	B		
270pF	271	T					B	B		B	B		
330pF	331						B	B		B	B		
470pF	471						B	B		B	B		
6,80pF	681									B	B		
1,000pF	102		T	T	T	T				B	B		
1,500pF	152		T	T	T	T				B	B		
2,200pF	222		T	T	T	T				B	B		
3,300pF	332		T	T	T	T				B	B		
4,700pF	472		T	T	T	T				B	B		
6,800pF	682		T	T	T	T				B	B		
0.010μF	103		T	T	T	T				B	B		B
0.015μF	153		T	T	T				B	B	B		B
0.022μF	223		T	T	T				B	B	B		B
0.033μF	333		T	T	T				B				B
0.047μF	473		T	T	T				B				B
0.068μF	683		T	T	T				B				B
0.10μF	104		T	T	T				B			B	B

MLCC

Chip R

Diode

Coil

Packaging Dimension and Quantity

Size	Thickness(mm)/Symbol	Symbol	Paper tape		Plastic tape		Tray packaged (pcs/tray)
			7" reel	13" reel	7" reel	13" reel	
01005(0402)	0.20±0.02	V	20K				
0201(0603)	0.30±0.03	L	15k	70k			
0402 (1005)	0.50±0.05	N	10k	50K			
	0.50 +0.02/-0.05	Q	10k	50K			
0603 (1608)	0.50±0.10	K	10k				
	0.50±0.10	U	4k				
	0.80±0.07	S	4k	15k			
0805 (2012)	0.80+0.15/-0.10	B	4k	15k			
	0.50±0.10	U	4k	15k			
	0.60±0.10	A	4k	15k			
1206 (3216)	0.80±0.10	X	4k	15k			
	0.85±0.10	T	4k	15k			
	1.25±0.10	C			3k	10k	
	1.25±0.20	I			3k	10k	
1210 (3225)	0.80±0.10	X	4k	15k			
	0.85±0.10	T	4k	15k			
	0.95±0.10	M			3k	10k	
	1.15±0.15	J			3k	10k	
	1.25±0.10	C			3k	10k	
	1.60±0.20	E			2k	10k	
	1.60 +0.30/-0.10	P			2k	9k	
0505 (1414)	0.85±0.10	T			4k	10k	
	0.95±0.10	M			3k	10k	
	1.25±0.10	C			3k	10k	
	1.60±0.20	E			2k	10k	
	2.00±0.20	F			1k	6k	
1808 (4520)	2.50±0.30	G			1k		
	1.15±0.15	J			3K	-	
	1.25±0.10	C			2k	10k	
1812 (4532)	1.60±0.20	E			2k	8k	
	2.00±0.20	F			1k	6k	
1825 (4563)	1.25±0.10	C			1k		
	1.60±0.20	E			1k		
	2.00±0.20	F			1k		
	2.50±0.30	G			0.5k	3k	
2211 (5728)	2.80±0.30	H			0.5k		
	2.00±0.20	F			1k		
2220 (5750)	2.50±0.30	G			0.5k		
	2.00±0.20	F			1k		
2225 (5763)	2.50±0.30	G			0.5k		
	2.00±0.20	F			1k		
1111 (2828)	≤ 1.78	G			2K	-	
2020							
3035							50pcs
3333							50pcs
3530							50pcs
3640							50pcs
3940							50pcs
4045							50pcs
4238							25pcs
4252							25pcs
4540							25pcs
5550	2.80±0.30	H					25pcs
5780	3.10±0.30	R					25pcs
5868	3.50±0.30	O					25pcs
6560							25pcs
7680							25pcs
7875							25pcs
7880							25pcs
8550							25pcs
8840							25pcs
42102							25pcs
10642							25pcs
13060							25pcs

THICKNESS DESCRIPTION	
Code	Description
A	0.60±0.10
B	0.8+0.15/-0.10
C	1.25±0.10
D	1.40±0.15
E	1.60±0.20
F	2.00±0.20
G	2.50±0.30
H	2.80±0.30
I	1.25±0.20
J	1.15±0.15
K	0.50±0.20
L	0.30±0.03
M	0.95±0.10
N	0.50±0.05
O	3.50±0.20
P	1.60+0.3/-0.10
Q	0.50+0.02/-0.05
R	3.10±0.30
S	0.80±0.07
S*	3.95±0.25 (For≥2225)
T	0.85±0.10
U	0.50±0.10
V	0.20±0.02
X	0.80±0.10
X*	4.45±0.25 (For≥2225)
Z	0.25±0.03

MLCC
Chip R
Diode
Coil



信昌電子陶瓷

Prosperity Dielectrics Co., Ltd.

■ Sales offices

台灣營業處 Taiwan Sales Office
總公司營業處 Sales Office - Headquarter
32668 桃園市楊梅區高獅路 566-1 號
No. 566-1, Kao-Shi Rd., Yangmei,
Taoyuan 32668, Taiwan
Tel: +886-3-475-3355
Fax: +886-3-485-4959
E-mail: service@pdc.com.tw

桃園營業處 Sales Office - Tao Yuan
33860 桃園市蘆竹區南山路二段 220-1 號
No. 220-1, Sec. 2, Nanshan Rd., Lujhu,
Taoyuan 33860, Taiwan
Tel: +886-3-322-4471
Fax: +886-3-322-9671
E-mail: service@pdc.com.tw
service-powder@pdc.com.tw

大陸營業處 China Sales Office
東莞營業處 Sales Office - Dong Guan, China
523799 中國廣東省東莞市大朗鎮
犀牛陂象山工業區美景西路 638 號
No. 638, Mei Jing West Road Xiniupo
Administrative Zone Dalang Town,
Dong Guan City, Guangdong Province, China
Tel: +86-769-8555-0979
Fax: +86-769-8555-0972
E-mail: service@pdc.com.tw

■ Plants

楊梅廠 (MLCC) Yang Mei Plant
32668 桃園市楊梅區高獅路 566-1 號
No. 566-1, Kaoshi Rd., Yangmei,
Taoyuan 32668, Taiwan
Tel: +886-3-475-3355
Fax: +886-3-485-4959

桃園廠 (Chip-R, Powder) Tao Yuan Plant
33860 桃園市蘆竹區南山路二段 220-1 號
No. 220-1, Sec. 2, Nanshan Rd., Lujhu,
Taoyuan 33860, Taiwan
Tel: +886-3-322-4471
Fax: +886-3-322-9671

吳江廠 (Powder) Wu Jiang Plant
215200 中國江蘇省吳江市運東經濟開發區
龐金路 2588 路
No.2588, Pangjin Rd., Economic Development Zone,
Wujiang, Jiangsu 215200
Tel: +86-512-6300-8899
Fax: +86-512-6300-9988

永州廠 (Coil) Yong Zhou Plant
425000 中國湖南省永州市冷水灘區鳳凰園
經濟開發區陶源路
Tao-Yuan Rd., Fenghuang Park,
Lengshuitan District, Yongzhou,
Hunan 425000
Tel: +86-746-8610-180
Fax: +86-746-8610-181